

BE CREATIVE WITH LIGHT.
AND WITH SYSTEM.





Dear Reader

Our company, founded in 1958, with its three product brands, broncolor, VISATEC and kobold, has developed over the past half-century into a “global player” in the international market for professional lighting systems. Today we serve three business sectors: professional photography, broadcasting/TV, and events. We chose “50 Light-Years Ahead” as the slogan for our jubilee year in 2008. This statement also reflects our commitment for the future.

The challenge of consistently meeting your needs and repeatedly surprising you with innovations is our motivation – and light our passion. Essentially, we have much in common. Every day and with every new assignment you are challenged to

create different, surprising, more refined images. In this we want to offer you our full support. We take advantage of every personal contact with your colleagues all over the world to ask which solutions would help them meet their daily challenges. The latest innovations from broncolor, which regularly achieve worldwide recognition, grow from these valuable inputs and the untiring efforts of our engineers in pursuit of technological development.

But in parallel with this spirit of innovation, the quality and reliability, that you expect in your daily work in the studio or on location, has lost none of its traditional high importance. Every unit that leaves our production facilities undergoes

exhaustive functional testing. Wherever possible, new developments are made compatible with earlier models. Systematically implemented over the years, this philosophy has enriched the broncolor product line to such an extent that it leaves almost nothing to be desired in terms of operating convenience, long-term value and reliability. And we stand by that.

On our website, www.broncolor.com, you will find detailed information about the entire broncolor product line. Judge for yourself! On the following pages we present the current broncolor product line. We look forward to counting you among our satisfied customers for many years to come.

Jacques Bron




 Sandro Babler, Switzerland

TABLE OF CONTENTS

| | |
|---|-----------|
| Company portrait | 6 |
| Technical concepts | 8 |
| broncolor technologies | 11 |
| The broncolor system | |
| Power packs | 16 |
| Battery power packs | 22 |
| Monolights | 26 |
| Monolight kits | 28 |
| Lamps | 30 |
| Picolite small lamp | 34 |
| Accessories Picolite small lamp | 35 |
| Para | 36 |
| Reflectors and attachments | 40 |
| Softboxes, octaboxes and speedrings | 42 |
| Special reflectors | 45 |
| Special effect lamps | 46 |
| Remote control | 50 |
| Light shapers in combination with lamps | 51 |
| Stands | 52 |
| Stand attachments | 53 |
| Flash tubes, modelling lamps and protecting glasses | 54 |
| broncolor HMI continuous light | 58 |
| HMI continuous light kits | 60 |
| broncolor HMI continuous light system | 61 |
| Various accessories | 62 |
| Useful information | 64 |
| Courses | 65 |
| Light Architecture 2 | 66 |
| Rental service | 67 |



Helge Kirchberger, Austria, Client: www.hangar-7.com

Creativity is compelling

In the professional community, the digital image is here to stay. The ability to edit images on computers is now taken for granted. But one factor remains unchanged: light. This factor drives our mission to accompany developments in photography and to advance technological progress in professional lighting. Today, broncolor is the leading brand globally for flash lighting systems, our products can be found in countless studios around the world. Precision, benchmark technology, quality and reliability are the drivers of this success story. Our headquarters and the technology centre are located in Allschwil near Basel, close to where the German,

French and Swiss borders meet. At this globally recognised research triangle, committed broncolor employees forge the future. broncolor is an international brand. Our representatives and service centres are qualified partners for our customers in over 60 countries.

The power of innovation

It is the think tank in which pioneering broncolor technologies were invented and are continually being refined. Its unfaltering quest for optimisation is based on a constant involvement at the forefront of electrical engineering as well as the identification of new materials and manufacturing processes. The ongoing dialogue with professi-

onal photographers and broncolor equipment users also plays an important role. These discussions have often inspired new generations of equipment, safeguarding continuity in an evolution that addresses genuine user needs. The best technical features are worth very little if they lack operating convenience. For this reason, broncolor also stands for design. Our products are ergonomic, easy to understand, and aesthetically appealing. As people whose perception is quintessentially visual, photographers especially appreciate these attributes.

Quality counts

Imagine a production day with models, makeup artists, hair stylists, assistants, creative directors, and the client assembled in a studio. Everything is in place, everything is ready. And then, at the decisive moment, the flash system fails: a catastrophe for the client, the agency, and the photographer. Apart from fascination and technical progress, what drives us is the meticulous compliance of every broncolor product with the loftiest standards of quality, precision, and dependability. And these standards are defined by the photographer's expectations. Prior to delivery, every single power pack, every monolight, and each lamp is painstakingly tested for unrestricted functionality and flawless quality. Our two-year factory warranty proves that we stand behind our work. This commitment is globally acknowledged.

The world is our home

Quality generates acceptance. The world's most professionally managed studios have embraced broncolor products as the standard for perfect lighting. In return, we emphasise worldwide customer support with more than 100 service centres. In addition to maintenance and repair specialists, every

broncolor representative is staffed with competent advisors who can assist photographers in solving lighting problems. At the same time, broncolor's in-house instructors provide training for local service technicians and acquaint them with innovations and new technologies.

In addition to the assurance that they can count on assured support virtually everywhere, photographers also have access to another welcome service at approaching 120 locations around the world: the "broncolor World Light Rental System." broncolor's dedication to quality is also evident by our popular workshops on lighting techniques and the numerous publications we produce. For details, see page 65, or log on to our website at www.broncolor.com.

Once you have made a decision in favour of broncolor, we provide regular software updates to make sure your product retains its functionality as long as possible, in some cases even extending its capabilities. This approach allows us to actively protect your investment in the interest of a long-term partnership – a partnership that lets you and us join forces to shape the future of light in photography.

How important are joules for exposure?

To be able to objectively evaluate and compare technical devices, assessment criteria that include technical and economic aspects have to be considered.

The amount of light reaching the CCD chip is important. The parameter J (joules) – also called Ws (watt-seconds) – quantifies the energy content or storage capacity of the flash capacitors. If a flash unit has a storage capacity of 300 joules, it can operate a 300-watt lamp for 1 second or a 300,000-watt lamp for 1/1000 second. The number of joules or watt-seconds gives no information

about the actual amount of light that is emitted and that is crucial for lighting purposes, since it ignores certain important factors that can decrease the conversion of electrical energy to light. For example, the flash tube and the unit must be co-ordinated with one another, the reflector must be adapted to the flash tube and the power cable must be dimensioned appropriately. Losses between the flash capacitors and flash tubes, which would otherwise have a negative effect on efficiency, are thereby minimised.

Guide numbers and f-stops

For amateur and portable flash

units, it is common to quote a guide number, which is the product of the f-stop and the distance between the subject and the light source. For example: distance from light source to subject = 2 m, measured f-stop = f/11; $2 \times 11 = 22$, and the guide number for that unit is therefore 22. If this value is to serve as a parameter for a flash unit, it must be dependably applicable in every case (i.e. constant). This condition is met only when the light intensity decreases as the square of the distance. This is certainly the case when the light source is small in comparison with the distance between it and the subject, a requirement which flash

units for amateurs fulfil very well, but only seldom flash systems. Their light sources are generally not point-like, but instead are often larger than the subject itself or the distance between the light source and subject. Since in this case the light does not diminish proportionally with the squared distance, the expected f-stop cannot be calculated with this method. For flash systems, therefore, the guide number is a purely theoretical value and not a usable parameter. broncolor therefore simply quotes the expected f-stop at a distance of 2 meters for its units. The advantage for photographers is that they get a definite state-

ment about exposure that has already taken into account all the losses and efficiencies not accounted for in the energy rating. The figure also allows users to compare the effects of different reflectors.

Flash units and digital photography

Light quality depends on two factors: first the quality of the light shaper that is used, and second the precision of the flash unit's control system. If the light quantity or light quality of different exposures is not identical, colour shifts are inevitable. broncolor flash systems offer precise control of flash

voltage. This outstanding repetitive precision is especially important for images using multi-shot cameras. The high-end Scorpio A power pack is moreover equipped with broncolor's patented ECTC (Enhanced Colour Temperature Control) technology, which ensures a constant (or deliberately variable) colour temperature over the entire control range.

For users of digital imaging systems who need completely computer-controlled image acquisition, broncolor offers units that can be remotely radio-controlled from a PC or Macintosh.





Ken Hermann, Denmark

Innovative Technologies – made in Switzerland

Innovation as motivation. Although the technologies we have developed are accepted as groundbreaking, they are continuously perfected or further developed. The basis for this is a constant desire to optimise and the continuing study of electrical technologies, new materials and alternative manufacturing processes. Photography is born of light – so it is our mission to accompany its development and to further the advance of technical progress in professional lighting technology.



FLASH CUT-OFF

Cut-off technology

Flash duration and light output are the two decisive factors in light control. A microprocessor in Scoro and Move power packs will calculate for you the shortest or longest flash duration for a given output. This enables rapid flash sequences with up to 50 flashes per second.



CONSTANT COLOUR
ECTC

Constant colour temperature – ECTC

Scoro S, Scoro E and Move are the only studio flash system which can maintain colour temperature over the entire power range at all outputs, or, when you need to, change it in calibrated steps of +/- 200 K at constant power (only Scoro S). The second generation of our patented ECTC (Enhanced Color Temperature Control) technology, which adapts flash voltage and flash duration to each other, achieves a constant colour temperature over the entire variation range at all lamps.



CONTROL RANGE

Individual power distribution

The Scoro S has three lamp outlets, the Scoro E and Move power packs have two each. Each lamp outlet has an individual power controller with LED display, which is adjustable independently of the other outlets. The unit therefore behaves like three (or two) independent power packs. You have a choice of up to 11 f-stops to set the flash output you need. That is a control range from 3 to 3200 J.



SPEED MODE

Speed Mode

In Speed Mode the charging time and flash duration are reduced by up to 50 %, and the maximum flash energy is reduced by 25%. In this way you can achieve up to ten exposures per second at full output, or up to 50 at reduced power. This makes Scoro and Move power packs the ultimate flash unit wherever speed is of the essence. And with its fan cooling even long flash series are no problem.


Speed meets precision – unbeatable flash times



FLASH CUT-OFF


Cut-off technology

For consistent flash energy, flash durations can be substantially shorter using broncolor cut-off technology than is possible with conventional units:

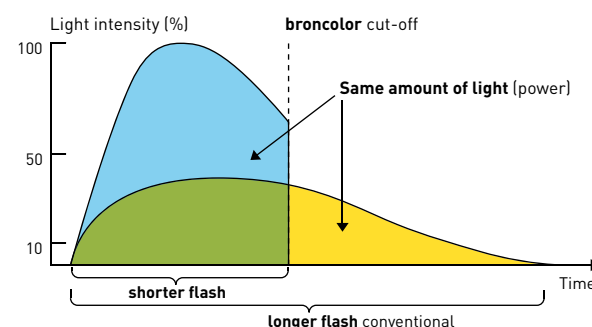


Why
t 0.1
and not
t 0.5?

Comparison without broncolor cut-off technology

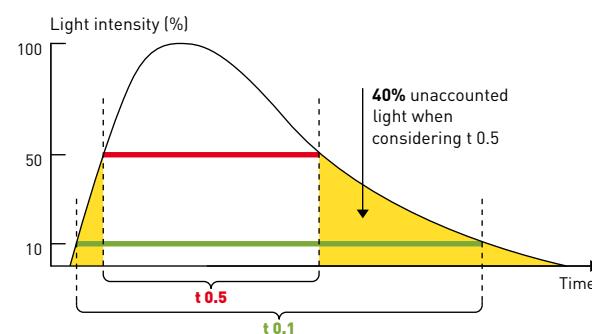

t 0.5 does not measure all light relevant for the complete shooting: light is radiated before and after t 0.5, which can result in blurring.

Comparison with broncolor cut-off technology

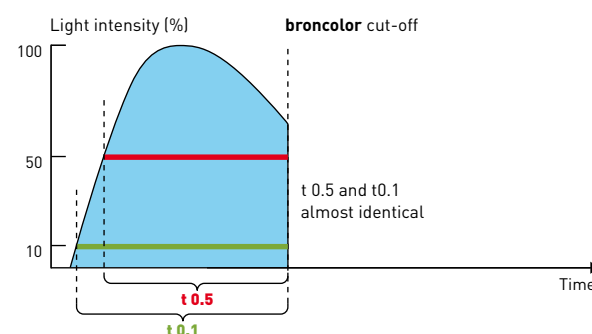

The total quantity of light is taken into account.
No blurring, because the flash is cut off.



t 0.1 = 1/600 s



t 0.5 = 1/600 s

Good to know

There is no generally valid factor for converting t 0.5 to t 0.1. It is therefore not correct to use t 0.5 to compare different flash durations; for comparisons t 0.1 must be known as well.

Absolute colour constancy with ECTC*




CONSTANT COLOUR ECTC

Constant colour temperature


Patented ECTC technology enables a constant average colour temperature over the entire output range.

The colour temperature tolerance band is only +/- 50 Kelvin.

It controls the amplitude of the blue light component according to the warmer red component, which originates at cut-off.

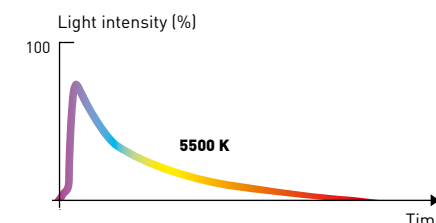

With this unique technology broncolor provides output control over 11 f-stops, or ten f-stop steps, at constant colour temperature. There is no other technology which compares with this performance. With other technologies such a constant colour temperature can only be attained over a maximum of four f-stops.

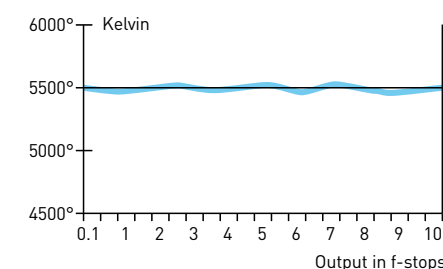

Even for fast flash sequences, constant colour temperature and quantity of light are the primary quality criteria for broncolor products.

*ECTC Enhanced Colour Temperature Control



with broncolor technology



without broncolor technology

Control meets efficiency –enormous control range, individually controllable



CONTROL RANGE

Power distribution

Scoro S units have three lamp outlets, Scoro E and Move have two each. Each lamp outlet has an individual power controller with LED display and is adjustable independently of the other outlets. The unit therefore behaves like three (or two) independent power packs.

The individual power distribution combined with the large control range, at its maximum from 3-3200 Joules, allows the photographer an almost free choice of f-stop.

The required flash output can then be chosen from up to 11 f-stops, or ten f-stop steps. A further power display provides information about the total energy supplied by the power pack. With the buttons beside the display it is possible to change the total energy of all channels simultaneously.



Aperture closed



Aperture open

Record charging times with Speed Mode



SPEED MODE

Speed Mode

In Speed Mode, Move can be operated at optimum colour temperature and maximum output with a minimum charging time of 0,9 s (600 J). The Scoro even manages 0,4 s at 1600 J. The shortest charging time is an unbelievable 0,02 s.

How is that possible?

With the Speed button the maximum energy is reduced by 25 % and, so, the charging time shortened by up to 50 %.

In this way Move, just like its big brother, the Scoro, achieves the world's shortest charging time of 0,02 s.

Using this technology stroboscope shootings can be illuminated with only a single flash unit. For example, in technical and scientific photography motion sequences can be made visible.

By alternately triggering several power packs, the number of flashes per second can even be doubled.



with broncolor technology



without broncolor technology

High-performance flash systems always consist of a separate power pack and one or more lamps. Advantages compared to monolights are the ability to connect several lamps, the big choice of special lamps (e.g. diffused-source lamps, spots, etc.), and the comprehensive range of accessories. The extensive range offers the right solution for every lighting assignment and every budget. Power packs, lamps and accessories from broncolor are, with very few exceptions, also compatible with current monolights, and offer an enormous spectrum of flash energies.

Scoro, the top model, features individual power distribution, i.e. all lamp outputs can be individually regulated. broncolor's patented ECTC technology (Enhanced Colour Temperature Control) ensures absolute control of colour temperature and flash duration over the entire output range. Numerous additional programmable functions enable widely differing applications. Scoro is the first power pack to incorporate all significant features: Scoro has the fastest charging time, roughly twice as fast as any of the others; Scoro has the shortest flash duration at every output rating; Scoro features the greatest range at constant colour temperature.

The Verso A power pack is noteworthy for its fast charging time, short flash duration, and individual power distribution. An option allows the unit to be operated from a battery. A Senso power pack is a good introduction to the broncolor system: Senso includes all the features of a studio flash unit in a small volume - ideal when you are on the road. The mains-independent power pack Move 1200 L is notable for its light weight, robustness, and user-friendly plug-in battery. Move is compatible with all broncolor flash units and lamps, and can be used both on location and in the studio.

On all broncolor studio power packs modelling light can be adjusted to be proportional to the differing flash outputs of diverse power packs, and to the number of lamps. In this way the lighting situation can be assessed in the correct relationship to the effective flash output. The robust housing protects the electronics in hard daily use, and the cooling fan and thermostat protect against damage from overheating. Modern micro-processor technology controls the various functions and simultaneously monitors the capacitor and operating modelling-light voltages. With their high-precision regulation of flash voltage, broncolor power packs are ideal for multi-shot digital photography. All models are equipped with a photo-cell and have a large adjustment range in 1/10 f-stop steps. As standard, Verso power packs are equipped with the radio system RFS, while Senso and Move power packs have RFS 2. For Scoro power packs, there is a choice of RFS or RFS 2. With this radio system, a power pack can be triggered by radio and controlled remotely.





FLASH CUT-OFF
t 0.1 = 1/10'000 s
t 0.5 = 1/14'000 s



CONSTANT COLOUR ECTC
5500 K



CONTROL RANGE
11 F-STOPS



SPEED MODE
0.02 s

Scoro S

- Ultra-fast flash times down to 1/10'000 s (t 0.1) or 1/14'000 s (t 0.5) thanks to innovative cut-off technology
- Extremely powerful lighting – outputs up to 3200 J
- Three lamp outlets, individually switchable and with fully independent control of each
- ECTC (Enhanced Color Temperature Control) technology for constant colour temperature, and selective colour temperature changing when required
- Long-life halogen modelling light, up to 3 × 650 W and five proportionality stages
- Robust, easily readable 8 cm LED display (240 × 180)
- Elegant, robust metal housing with carbon-look and massive carrying handle
- Speed Mode
- Memory function
- Further special functions, such as alternation, delay and stroboscopic effects



Scoro 1600 S RFS | 31.041.XX
Scoro 1600 S RFS 2 | 31.044.XX

Scoro 3200 S RFS | 31.043.XX
Scoro 3200 S RFS 2 | 31.045.XX

| Normal mode | | | |
|---|---|---------------------------|--|
| Flash energy | 1600 J | | 3200 J |
| f-stop at 2 m, 100 ISO, reflector P70 | 64 ² /10 | | 90 ² /10 |
| Flash duration at max. energy* t 0.1 (t 0.5) | 1/325 s (1/760 s) | | 1/160 s (1/390 s) |
| Variation range for flash duration* t 0.1 (t 0.5) | 1/150 – 1/10'000 s (1/450 – 1/14'000 s) | | 1/85 – 1/10'000 s (1/240 – 1/14'000 s) |
| Charging time (min. – max. energy) at | 230 V | 0,02 – 0,6 s | 0,02 – 1,3 s |
| | 120 V | 0,02 – 1,0 s | 0,02 – 2,0 s |
| | 100 V | 0,02 – 1,1 s | 0,02 – 2,2 s |
| | | Switchable to slow charge | Switchable to slow charge |

Speed Mode

| | | | |
|---|---|--|--------------|
| Flash energy | 1200 J | 2400 J | |
| f-stop at 2 m, 100 ISO, reflector P70 | 45 ⁹ /10 | 64 ⁹ /10 | |
| Flash duration at max. energy* t 0.1 (t 0.5) | 1/435 s (1/1'600 s) | 1/215 s (1/860 s) | |
| Variation range for flash duration* t 0.1 (t 0.5) | 1/150 – 1/10'000 s (1/450 – 1/14'000 s) | 1/85 – 1/10'000 s (1/240 – 1/14'000 s) | |
| Charging time (min. – max. energy) at | 230 V | 0,02 – 0,4 s | 0,02 – 0,8 s |
| | 120 V | 0,02 – 0,6 s | 0,02 – 1,2 s |
| | 100 V | 0,02 – 0,7 s | 0,02 – 1,4 s |

| | | | |
|--|--|----------------|--|
| Ready display | Visual and audible (can be switched off), activated when 100% of the selected energy is reached | | |
| Lamp outlets | 3 outlets with flash cut-off and ECTC | | |
| Power distribution | Symmetrical and individually asymmetrical | | |
| Control elements | Dust and scratch-resistant, illuminated silicone keypad, setting by radio remote control | | |
| Control range for flash energy | Over 10 f-stops | | Over 11 f-stops |
| | in ¹ /10 or full f-stop intervals. Choice of joules or percent for LCD display | | |
| Colour temperature | ECTC technology (Enhanced Colour Temperature Control) for constant or specifically adjustable colour temperature | | |
| Modelling light | Halogen max. 3 × 650 W at 200 – 240 V / Halogen max. 3 × 300 W at 100 – 120 V | | |
| | Proportional to flash energy, also full and low settings. | | |
| | Proportionality can be adapted to other broncolor power packs and to monolights | | |
| Additional functions | t 0.1, sequence, delay, interval, colour temperature, alternating, stroboscopic, memory, and many more | | |
| Flash release | Manual release button, photocell, infrared RFS or RFS 2 receiver, may be switched off sync cable, IRX 2 | | |
| Number of sync sockets | 1 | 1 | |
| Computer connection for remote control | 1 | 1 | |
| Stabilised flash voltage | +/- 0,3% | | +/- 0,3% |
| Power requirements | 16,0 A (230 V) | 15,0 A (120 V) | 15,0 A (100 V) |
| Dimensions without handle | 28,8 × 19 × 29,5 cm (11,3 × 7,5 × 11,6") | | 28,8 × 19 × 40 cm (11,3 × 7,5 × 15,7") |
| Weight | 8,9 kg (19,6 lbs) | | 12,1 kg (26,7 lbs) |

*Automatic regulation of flash duration and energy for optimum colour temperature. Preselection of minimum flash duration possible



FLASH CUT-OFF
t 0.1 = 1/8'000 s
t 0.5 = 1/12'000 s



CONSTANT COLOUR ECTC
5500 K



CONTROL RANGE
9 F-STOPS

Scoro E

- Ultra-fast flash times down to 1/8'000 s (t 0.1) or 1/12'000 s (t 0.5) thanks to innovative cut-off technology
- Extremely powerful lighting – outputs up to 3200 J
- Two lamp outlets with individual cut-off and fully independent control of each
- ECTC (Enhanced Color Temperature Control) technology for constant colour temperature of every firing
- Long-life halogen modelling light, up to 3 × 650 W and five proportionality stages
- Robust, easily readable 8 cm LED display (240 × 180)
- Elegant, robust metal housing with carbon-look and massive carrying handle



Scoro 1600 E RFS | 31.060.XX
Scoro 1600 E RFS 2 | 31.062.XX

Scoro 3200 E RFS | 31.061.XX
Scoro 3200 E RFS 2 | 31.063.XX

| | | | |
|---|--|--|---------------------------|
| Flash energy | 1600 J | 3200 J | |
| f-stop at 2 m, 100 ISO, reflector P70 | 64 ² /10 | 90 ² /10 | |
| Flash duration at max. energy* t 0.1 (t 0.5) | 1/325 s (1/760 s) | 1/160 s (1/390 s) | |
| Variation range for flash duration* t 0.1 (t 0.5) | 1/265 – 1/8'000 s (1/760 – 1/12'000 s) | 1/132 – 1/8'000 s (1/390 – 1/12'000 s) | |
| Charging time (min. – max. energy) at 230 V | 0,06 – 1,0 s | 0,06 – 1,7 s | |
| | 120 V | 0,06 – 1,4 s | 0,06 – 2,4 s |
| | 100 V | 0,06 – 1,5 s | 0,06 – 2,6 s |
| | | Switchable to slow charge | Switchable to slow charge |

| | | | |
|--|---|----------------|--|
| Ready display | Visual and audible (can be switched off), activated when 100% of the selected energy is reached | | |
| Lamp outlets | 2 outlets with flash cut-off and ECTC | | |
| Power distribution | Symmetrical and individually asymmetrical | | |
| Control elements | Dust and scratch-resistant, illuminated silicone keypad, setting by radio remote control | | |
| Control range for flash energy | Over 8 f-stops | | Over 9 f-stops |
| | in ¹ /10 or full f-stop intervals. Choice of joules or percent for LCD display | | |
| Colour temperature | ECTC (Enhanced Color Temperature Control) technology for constant colour temperature | | |
| Modelling light | Halogen max. 2 × 650 W at 200 – 240 V / Halogen max. 2 × 300 W at 100 – 120 V | | |
| | Proportional to flash energy, also full and low settings | | |
| | Proportionality can be adapted to other broncolor power packs and to monolights | | |
| Additional functions | t 0.1, sequence | | |
| Flash release | Manual release button, photocell, RFS or RFS 2 receiver, may be switched off, sync cable | | |
| Number of sync sockets | 1 | 1 | |
| Computer connection for remote control | 1 | 1 | |
| Stabilised flash voltage | +/- 0,5% | | +/- 0,5% |
| Power requirements | 16,0 A (230 V) | 15,0 A (120 V) | 15,0 A (100 V) |
| Dimensions without handle | 28,8 × 19 × 29,5 cm (11,3 × 7,5 × 11,6") | | 28,8 × 19 × 40 cm (11,3 × 7,5 × 15,7") |
| Weight | 8,7 kg (19,2 lbs) | | 12 kg (26,5 lbs) |

*Automatic regulation of flash duration and energy for optimum colour temperature. Preselection of minimum flash duration possible



CONTROL RANGE
7,5 F-STOPS

Senso

- High repetitive precision of the colour temperature
- 3 lamp outlets, control over 2 individual channels
- Photocell, infrared and RFS 2 receiver for flash triggering (can be switched off)
- Internal discharge when the power output is reduced
- Slow charge (selectable)
- Front panel, resistant to dust and scratches with illuminated silicone keyboard and LED displays
- Memory function
- Modelling light with two different proportionality levels
- TIPA Award Winner 2011



| | Senso 1200 31.050.XX | Senso 2400 31.051.XX |
|---|---|--|
| Flash energy | 1200 J | 2400 J |
| f-stop at 2 m (6 ½ ft), 100 ISO, | Litos lamp | Litos lamp |
| - with Litos reflector | 32 ¹ / ₁₀ | 45 ¹ / ₁₀ |
| - with P70 reflector | 45 ⁸ / ₁₀ | 64 ⁸ / ₁₀ |
| | Pulso G lamp | Pulso G lamp |
| - with P70 reflector | 45 ⁷ / ₁₀ | 64 ⁷ / ₁₀ |
| Flash duration t 0.1 (t 0.5) at 230 V | Litos lamp | Litos lamp |
| | 1200 J: 1/180 s (1/600 s) | 2400 J: 1/90 s (1/300 s) |
| | 600 J: 1/360 s (1/1200 s) | 1200 J: 1/180 s (1/600 s) |
| | Pulso G / Unilite lamp | Pulso G / Unilite lamp |
| | 1200 J: 1/100 s (1/300 s) | 2400 J: 1/50 s (1/150 s) |
| | 600 J: 1/200 s (1/600 s) | 1200 J: 1/100 s (1/300 s) |
| Charging time (100% of selected energy) | 0,4 – 1,5 s (230 V) | 0,4 – 2,8 s (230 V) |
| | 0,4 – 1,5 s (120 V) | 0,4 – 2,8 s (120 V) |
| | 0,5 – 1,9 s (100 V) 900 J | 0,5 – 3,9 s (100 V) 1800 J |
| Ready display | Visual and audible (can be switched off), signals when 100% of selected energy is reached | |
| Number of lamp outlets | 3 | 3 |
| Power distribution | Free asymmetry up to 5 f-stops in whole and ¹ / ₁₀ f-stop intervals | |
| Control range of flash energy | 7,5 f-stops or 13 J to 1200 J (1 lamp) with activated symmetry switch | |
| Modelling light | 100 – 240 V, halogen max. 3 × 300 W (Litos) 230 V, halogen max. 3 × 650 W (Pulso G / Unilite) | |
| | Proportional to flash energy, full power | |
| Flash release | Manual release button, photocell, RFS 2 receiver (radio frequency), sync cable | |
| Radio (2.4 GHz) | 99 workstations, 99 unit addresses, 40 selectable frequency channels | |
| No. of sync sockets | 1 | 1 |
| Dimensions (L×W×H) | 20,3 × 14,8 × 21,8 cm (8 × 5,8 × 8,6") excl. handle | 203 × 148 × 300 mm (8 × 5,8 × 11,8"), excl. handle |
| Weight | 4,6 kg (10,1 lbs) | 6,9 kg (15,2 lbs) |

Accessories

Stand holder Senso

35.117.00



Senso kit 21

31.052.XX

comprises:

- 1 power pack Senso 1200
- 1 Litos lamp
- 1 Flex 70 × 70 cm (28 × 28")
- 1 sync cable 5 m (16 ft)
- 1 bag

Senso kit 22

31.053.XX

Scope of delivery same as Senso kit 21, but with 2 Litos lamps

Senso kit 41

31.054.XX

comprises:

- 1 power pack Senso 2400
- 1 Litos lamp
- 1 Flex 70 × 70 cm (28 × 28")
- 1 sync cable 5 m (16 ft)
- 1 bag

Senso kit 42

31.055.XX

Scope of delivery same as Senso kit 41, but with 2 Litos lamps



FLASH CUT-OFF
t 0.1 = 1/8'500 s
t 0.5 = 1/20'000 s



CONSTANT COLOUR ECTC
5500 K



CONTROL RANGE
9 F-STOPS



SPEED MODE
0.02 s



Move 1200 L

(including protective bag, plug-in lithium battery and charger)

- Super-fast flash durations up to 1/8'500 s (t 0.1) or 1/20'000 s (t 0.5) thanks to innovative cut-off technology
- Outputs up to 1200 J
- Two lamp outlets with individual cut-off and fully independent control of each
- ECTC (Enhanced Color Temperature Control) technology for constant colour temperature
- Speed Mode
- Eco operation for more flashes per battery charge (up to 230 flashes at full power)
- Unbelievably small, light and compact
- Robust housing with eight "protection bumpers"
- Variable operating-period limits for modelling light



Move 1200 L | 31.016.XX

| | |
|--|--|
| Flash energy | 1200 J |
| f-stop at 2 m (6 ½ ft), 100 ISO, P70 reflector | 64 1/10 (with MobiLED) |
| Flash duration t0.1 (t0.5) | fastest: 1/8'500 s (1/20'000 s) max. energy: 1/350 s (1/1000 s) |
| Charging time (for 100% of selected energy) | 0,02 – 1,9 s (Speed Mode 0,02 – 0,9 s) |
| No. of flashes per battery charge | approx. 170 / 230 (Eco-Mode) at 1200 J approx. 50'000 at 4 J |
| Lamp outlets | 2 outlets with flash cut-off and ECTC |
| Power distribution | Symmetrical and individually asymmetrical |
| Controls | illuminated silicone keyboard, resistant to dust/scratches, LCD display |
| Flash energy control range | 9 f-stops in 1/10 or full f-stop intervals Display in joules or percent (4,5 – 1200 J) |
| Modelling light | Max. 2 × halogen 100 W or 2 × LED 30 W charge selectable switch-off time setting (10/30/60 s) Operatig in continuous light mode over 2 hours |
| Colour temperature | ECTC technology (Enhanced Colour Temperature Control) for constant colour temperature |
| Flash triggering | Manual release button, photocell, RFS 2, sync cable |
| Radio release | outdoors up to 50 m (164 ft) (possible range up to 300 m / 984 ft) indoors up to 30 m (98 ft) (possible range up to 300 m / 984 ft) |
| Dimensions (L×W×H) excl. handle | 21 × 17 × 23 cm (8,3 × 6,7 × 9") |
| Weight of power pack | 6,2 kg (13,7 lbs) |
| Lithium battery | 14,4 V / 6,6 AH Li-FePo4 with integrated battery status |
| Accessories | outdoor trolley backpack (S.23), weatherproofed power pack soft case, rechargeable battery, battery recharger, continuous light adapter |

Move Outdoor kit 1

31.026.XX

comprises:

- 1 power pack Move 1200 (incl. battery)
- 1 MobiLED lamp
- 1 Softbox Flex 70 × 70 cm (28 × 28")
- 1 RFS 2 transmitter kit
- 1 battery recharger
- 1 sync cable
- 1 adapter cable
- 1 continuous light adapter
- 1 protecting soft case
- 1 outdoor trolley backpack



Move Outdoor kit 2

31.027.XX

comprises:

- 1 power pack Move 1200 L (incl. battery)
- 2 MobiLED lamps
- 1 Softbox Flex 70 × 70 cm (28 × 28")
- 1 umbrella 85 cm
- 1 RFS 2 transmitter kit
- 1 battery recharger
- 1 sync cable
- 1 adapter cable
- 1 continuous light adapter
- 1 protecting soft case
- 1 outdoor trolley backpack



Outdoor Para kit

31.028.XX

comprises:

- 1 power pack Move 1200 L (inkl. battery)
- 1 MobiLED lamp
- 1 Para 88 P kit
- 1 RFS 2 transmitter kit
- 1 battery recharger
- 1 sync cable
- 1 adapter cable
- 1 continuous light adapter
- 1 protecting soft case
- 1 outdoor trolley backpack



Accessories

Protecting soft case

36.520.00



Battery recharger

36.151.00



Continuous light adapter

36.129.00



Outdoor trolley backpack

36.519.00



Lithium battery

36.152.00



Verso A2 and A4 RFS

- Automatic stabilisation of colour temperature
- High repetitive precision for digital imaging
- Mains-independent operation with Power Dock (accessory)
- Individual power output distribution over 2 channels
- 3 lamp outlets
- Wide control range of the flash energy
- Flash release possible via radio and infrared
- Automatic flash release control
- Illuminated silicone keyboard and LCD-display, resistant to dust and scratches
- Sensitivity of the photocell can be reduced
- Additional function flash sequences (flash series)
- Automatic adaptation to the respective mains power



Verso A2 RFS mains-operated | 31.031.XX **Verso A4 RFS mains-operated** | 31.033.XX
Verso A2 RFS 2 mains-operated | 31.034.XX **Verso A4 RFS 2 mains-operated** | 31.035.XX

| | | |
|--|--|--|
| Flash energy | 1200 J | 2400 J |
| f-stop at 2 m (6 ½ ft), 100 ISO, Refl. P70 | 45 ⁷ / ₁₀ | 64 ⁷ / ₁₀ |
| Flash duration t 0.1 (t 0.5) at 230 V | 1200 J: 1/500 s (1/1500 s) | 2400 J: 1/250 s (1/750 s) |
| | 600 J: 1/900 s (1/2500 s) | 1200 J: 1/450 s (1/1250 s) |
| | 300 J: 1/1200 s (1/3500 s) | 600 J: 1/600 s (1/1700 s) |
| Charging time at fast charge (230 V) | 0,2 – 0,8 s | 0,3 – 1,7 s |
| Ready display | visual and audible (can be switched off) | visual and audible (can be switched off) |
| Lamp outlets | 3 | 3 |
| Power output distribution | individual (asymmetrical) | individual (asymmetric) |
| Control range flash energy | channel 1 (without using channel 2): over 7 f-stops, channel 1 and 2 or channel 2: over 6 f-stops | |
| Modelling light (230 V) | halogen max. 3 × 650 W | halogen max. 3 × 650 W |
| Flash release | RFS transmitter, RFS transceiver (10 channels), IR-receiver and photocell (can be switched off), sync cable, IRX 2, manual release button | |
| Radio | operational distance outdoors up to 50 m (164 ft) possible range up to 300 m (984 ft) operational distance in closed rooms up to 30 m (98,4 ft) possible range up to 300 m (984 ft) | |
| Sync sockets | 1 | 1 |
| Dimensions (L×W×H) | 29 × 18,5 × 31,5 cm (11,4 × 7,3 × 12,4") | 29 × 18,5 × 38 cm (11,4 × 7,3 × 15") |
| Weight | 7,5 kg (16,5 lbs) | 10,4 kg (22,9 lbs) |
| Power requirements | 230 V / 50 Hz, 120 V / 50 – 60 Hz, 100 V / 50 Hz | 230 V / 50 Hz, 120 V / 50 – 60 Hz, 100 V / 50 Hz |
| Number of flashes per battery charge (max./min. power) | fast charge: approx. 350 – 38'000 | fast charge: approx. 180 – 19'000 |
| | normal charge: approx. 450 – 50'000 | normal charge: approx. 240 – 25'000 |

Accessories

Power Dock for Verso A2 / A4 RFS power pack

36.124.00
Enables mains-independent operation with Verso A2 and A4
To be docked on the bottom of the power pack
30,8 × 18,5 × 22,9 cm (12 × 7,3 × 9")
12,3 kg (27 lbs)



Tim Lüdin, Switzerland



Minicom

The Minicom monolight is ideal as an introduction to the broncolor system or as a supplementary unit. It offers short flash duration, large control range and excellent repetitive precision. In addition the sensitivity of the photocell can be reduced. Minicom 160 is a powerful monolight that is perfect for lighting larger sets. Its features include stepless control range and a visual flash monitor.

broncolor monolights cover the power spectrum from 10J to 1200 J, and are also available in kits. They have a powerful halogen modelling light, which is proportional to broncolor power pack outputs. With their integrated broncolor bayonet and release catch the light shapers can be rotated through 360° and changed quickly and safely. Accessories are compatible and can be used with broncolor power packs and lamps. All models are fitted with a photocell

and an infra-red receiver. Minicom is also available in an RFS 2 version. Units equipped with an RFS interface can be triggered and remotely controlled by radio signals.

broncolor compact units are supplied with a 5900 K flash tube, halogen modelling lamp, UV-coated 5500 K protective glass (guarantees neutral colour rendering) and a transparent transport cap.

Minicom

- High repetitive precision for digital imaging
- Large control range of the flash energy
- Flash release also possible via radio (optional) and infrared
- Automatic flash release control
- Illuminated silicone keyboard and LED-display, resistant to dust and scratches
- Additional flash sequences (flash series)
- Sensitivity of the photocell can be reduced
- Automatic adaptation to the respective mains power
- Dual voltage unit
- Delivery of RFS or RFS 2 version possible



| | Minicom 40 31.405.XX | Minicom 80 31.415.XX | Minicom 160 31.474.XX |
|--|---|---------------------------------|-------------------------------------|
| Flash energy | 300 J | 600 J | 1200 J |
| f-stop at 2 m (6 ½ ft), 100 ISO, refl. P70 | 22 ⁵ / ₁₀ | 32 ⁵ / ₁₀ | 64 ⁴ / ₁₀ |
| Flash duration t 0.1 (t 0.5) | 1/900 s (1/2500 s) | 1/420 s (1/1500 s) | 1/350 s (1/1100 s) |
| Charging time (230 V) | 0,3 – 0,9 s | 0,4 – 1,4 s | 0,5 – 2,4 s |
| Ready display | visual and audible (can be switched off) | | |
| Control range flash energy | over 4 f-stops, in ¹ / ₁₀ f-stop intervals, switchable to 5 f-stops | | |
| Modelling light (230 V) | halogen max. 300 W | halogen max. 300 W | halogen max. 650 W |
| Flash release | infrared receiver and photocell (can be switched off), sync cable, manual release button | | |
| Sync sockets | 2 | 2 | 2 |
| Dimensions (L×W×H) | 28,6×15,4×19,4 cm (11,2×6×7,6") | 28,6×15,4×19,4 cm (11,2×6×7,6") | 35,5×15,4×19,4 cm (13.9 × 6 × 7.6") |
| Weight | 3 kg (6,6 lbs) | 3,3 kg (7,2 lbs) | 4,4 kg (9,7 lbs) |
| Power requirements | 230 V / 50 – 60 Hz, 120 V / 50 – 60 Hz | | |

| | Minicom 40 RFS 31.406.XX Minicom 40 RFS 2 31.407.XX | Minicom 80 RFS 31.416.XX Minicom 80 RFS 2 31.417.XX | Minicom 160 RFS 31.473.XX Minicom 160 RFS 2 31.475.XX |
|--------------------------------------|---|--|--|
| Flash release | infrared receiver and photocell (can be switched off), sync cable, manual release button and by radio | | |
| Sync sockets | 2 | 2 | 2 |
| Operational distance outdoors | up to 30 m (98,4 ft) possible range up to 300 m (984 ft) | | |
| Operational distance in closed rooms | up to 20 m (64 ft) possible range up to 300 m (984 ft) | | |

Accessories

| | | | |
|--|---|--|---|
| Flash tube 600 J for Minicom 40 / 80: 34.307.00 1200 J for Minicom 160: 34.310.00 |  | Protecting glass clear: 34.336.00 mat: 34.337.00 |  |
| Halogen modelling lamp 300 W / 120 V 34.234.XX with fuse |  | Light bag 36.518.00 for 1 monolight and accessories 53 × 18 × 40 cm (21 × 7 × 15,7") |  |
| Halogen modelling lamp 300 W / 230 V 34.233.XX with fuse |  | Big bag 36.517.00 for 2 – 3 monolights and accessories 96 × 45 × 26 cm (37,8 × 17,7 × 10") |  |
| Halogen modelling lamp 650 W / 230 V 34.226.XX with fuse |  | | |

Because of the laws in some countries, the use of the broncolor radio system is not allowed.

broncolor monolights are also available as kits. The complete kits have a large assortment and are also reliable on location, easily transportable and have powerful light sources.

Minicom Location kit

31.498.XX
comprises:
2 Minicom 160, 2 P-Travel reflectors,
1 sync cable 10 m (32 ft),
1 Big bag, 1 stand bag, 2 stands



Minicom Location kit RFS / RFS 2

RFS 31.499.XX | RFS 2 31.502.XX
Scope of delivery same as Minicom Location kit,
and in RFS version incl. RFS transmitter / RFS 2

Minicom Expert kit

31.493.XX
comprises:
3 Minicom 80, 2 P-Travel reflectors, 1 barn door for P-Travel,
1 umbrella reflector, 1 umbrella silver, 1 Softbox 60 × 100,
1 IRX 2, 1 sync cable 5 m (16 ft), 1 Big bag, 1 stand bag, 3 stands



Minicom Expert kit RFS / RFS 2

RFS 31.497.XX | RFS 2 31.503.XX
Scope of delivery same as Minicom Expert kit,
and in RFS version incl. RFS transmitter
(instead of IRX 2 transmitter) rsp. RFS 2

Minicom Pro kit

31.500.XX
comprises:
3 Minicom 160, 2 P-Travel reflectors, 1 barn door for P-Travel,
1 umbrella reflector, 1 umbrella silver, 1 Softbox 60 × 100,
1 IRX 2, 1 sync cable 5 m (16 ft), 1 Big bag, 1 stand bag, 3 stands



Minicom Pro kit RFS / RFS 2

RFS 31.501.XX | RFS 2 31.504.XX
Scope of delivery same as Minicom Pro kit,
and in RFS version incl. RFS transmitter
(instead of IRX 2 transmitter) rsp. RFS 2

Ray Demski, Germany

Because of the laws in some countries, the use of the broncolor RFS radio system is not allowed.



The extensive range of lamps meets every photographer's needs for creative light management. The lamp is the critical element in terms of light quality, but that quality is also influenced by other factors: the shape and coating of the flash tube, the characteristics and surface of the reflectors, the uniformity of illumination along a defined reflector axis, the match between the emission characteristics of the flash and the modelling light, the optimum colour temperature and much more besides. broncolor Pulso G, Unilite and Pulso Twin lamps all have compact dimensions, a bright halogen modelling light, fan cooling, a thermal circuit breaker and plug-in flash tubes.

With their integrated broncolor bayonet and release catch the light shapers can be rotated through 360° and changed quickly and safely. Twin lamps allow the energy of two power packs to be concentrated into one lamp. The Picolite small lamps have their own accessories and, with a Pulso adapter, can also be fitted with lightweight broncolor reflectors and other accessories. Litos, the designer lamp, was especially developed for the Senso power pack, and combines multifunctionality and compactness in one. The Litos scope of supply includes an umbrella or standard reflector. As one of the first suppliers worldwide, broncolor focuses on LED technology and in 2011 introduced

the first flash lamp with LED modelling light – the MobiLED. With 30 W (comparable with 100 W halogen) and 5500 K colour temperature, the MobiLED gives photographers the ability to merge the field of photography with film for the first time. For customised lighting, users can select from a wide range of light shapers with accessories. A variety of accessories and stands are available for all broncolor lamps to ensure ease of handling.

broncolor lights are supplied with a 5900 K flash tube, halogen modelling lamp, UV-coated 5500 K protective glass (guarantees neutral colour reproduction) and a transparent transport cap.

Frank Meyl, Germany / USA



Pulso G lamp

- Corresponding emission characteristics of flash tubes and modelling light
- Can be equipped with 1600 J or 3200 J flash tubes
- Plug-in flash tube and protecting glass (with mechanical safety device)
- Front focusing device
- Quick release bracket
- Automatic locking mechanism of the light shaper (rotatable 360°)
- Integrated tilt head with locking lever for an optimal breaking effect
- Integrated umbrella holder
- Cooling fan and thermal protection
- Automatic adaptation to the respective mains power supply (after exchange of the halogen modelling lamp)



Pulso G lamp | 1600 J: 32.115.XX | 3200 J: 32.116.XX

| | |
|-------------------------|--|
| Flash energy | max. 3200 J |
| Modelling light (230 V) | halogen max. 650 W |
| Length lamp cable | 5 m (16 ft) |
| Dimensions (Ø×L×H) | Ø 13 × 31 × 20 cm (5,1 × 12,2 × 7,8") |
| Weight (with cable) | 3,15 kg (6,9 lbs) |
| Stand support | for bolts 12 mm, 3/8" thread and bolts 16 mm |

Unilite lamp

- Corresponding emission characteristics of flash tubes and modelling light
- Can be equipped with 1600 J or 3200 J flash tubes
- Plug-in flash tube and protecting glass (with mechanical safety device)
- Quick release bracket
- Automatic locking mechanism of the light shaper (rotatable 360°)
- Built-in tilt head with locking lever for an optimal breaking effect
- Integrated umbrella holder
- Cooling fan and thermal protection
- Automatic adaptation to the respective mains power supply (after exchange of the halogen modelling lamp)



Unilite lamp | 1600 J: 32.113.XX | 3200 J: 32.114.XX

| | |
|-------------------------|--|
| Flash energy | max. 3200 J |
| Modelling light (230 V) | halogen max. 650 W |
| Length lamp cable | 5 m (16 ft) |
| Dimensions (Ø×L×H) | Ø 12,6 × 30 × 17,5 cm (4,9 × 11,8 × 6,9") |
| Weight (with cable) | 2,8 kg (6,2 lbs) |
| Stand support | for bolts 12 mm, 3/8" thread and bolts 16 mm |

Accessories

Flash tube 1600 J

34.322.00 (for Unilite and Pulso G)



Flash tube 3200 J

34.324.00 (for Unilite and Pulso G)



Halogen modelling lamp 300 W / 120 V

34.225.XX Pulso G / 34.234.XX Unilite
with fuse



Halogen modelling lamp 650 W / 230 V

34.226.XX Pulso G / 34.235.XX Unilite
with fuse



Protecting glass

34.336.00



Protecting glass, mat

34.337.00



Litos lamp (for Senso)

- Corresponding emission characteristics of flash tube and modelling light
- Built-in pan/tilt head for one-hand operation
- Quick release bracket and integrated umbrella holder
- Including standard and/or umbrella reflector
- Thermal protection (fan only switches on when required)
- Plug-in flash tube and protecting glass (with triple mechanical safety device)



Litos lamp | 32.030.XX

| | |
|--------------------|--|
| Flash energy | max. 2400 J |
| Modelling light | 300 W halogen (3.15 AF) |
| Cooling | temperature controlled (fan) |
| Length of cable | 4,5 m (14,8 ft) |
| Dimensions (Ø×L×H) | Ø 12 × 24,3 × 17,2 cm (4,7 × 9,6 × 6,8") |
| Weight with cable | 2,3 kg (5,1 lbs) |
| Stand adapter | for broncolor 12 mm (0,47") bolt, 3/8" thread and 16 mm (0,63") bolt |

Accessories

Flash tube 2400 J

34.313.00



Halogen modelling lamp 300 W / 230 V

34.233.XX

with fuse



Protecting glass

clear: 34.339.00

mat: 34.340.00



Lamp extension cable

5 m: 34.153.00

10 m: 34.154.00



MobiLED lamp

- Built-in pan/tilt head for one-hand operation
- Quick release bracket and integrated umbrella holder
- Including standard and/or umbrella reflector
- Thermal protection (fan only switches on when required)
- Plug-in flash tube and protecting glass (with triple mechanical safety device)
- LED modelling light with a colour temperature of 5500 K, only working with Move 1200 L and Mobil



MobiLED lamp | 32.013.00

| | |
|--|--|
| Flash energy | 1200 J (max. 1600 J) |
| Modelling light | 30 W LED |
| Length of cable | 3,5 m (11,5 ft) |
| Dimensions (Ø×L×H) | Ø 12 × 24,3 × 17,2 cm (4,7 × 9,6 × 6,8") |
| Weight (without reflector and accessories) | 1,7 kg (3,7 lbs) |
| Stand adapter | for broncolor 12 mm (0,47") bolt, 3/8" thread and Manfrotto 16 mm (0,63") bolt |

Accessories

Flash tube 1600 J

34.308.00



Protecting glass

clear: 34.339.00

mat: 34.340.00



MobiLED Continuous light adapter

36.129.00



Pulso-Twin lamp

- Corresponding emission characteristics of flash and modelling light
- Plug-in flash tube with integrated protecting glass
- Quick release bracket
- Automatic locking mechanism of the light shaper (rotatable 360°)
- Built-in tilt head with locking lever for an optimal breaking effect
- Cooling fan and thermal protection



Pulso-Twin lamp | 32.117.XX

| | |
|-------------------------|--|
| Flash energy | max. 2 × 3200 J |
| Modelling light (230 V) | halogen max. 650 W |
| Length lamp cable | 2 × 5 m (2 × 16 ft) |
| Dimensions (Ø×L×H) | Ø 12 × 27,5 × 20 cm (4,7 × 10,4 × 7,8") |
| Weight | 4 kg (8,8 lbs) |
| Stand support | for bolts 12 mm, 3/8" thread and bolts 16 mm |

Accessories

Flash tube 2 × 3200 J incl. protecting glass

34.327.00

for Pulso-Twin



Halogen modelling lamp 650 W / 230 V

34.226.XX

with fuse



Halogen modelling lamp 250 W / 120 V

34.221.XX

with fuse



Picolite small lamp

- Corresponding emission characteristics of flash tubes and modelling light
- Plug-in flash tube and protecting glass (with mechanical safety device)
- Integrated reflector
- Adapter for own accessories with small dimensions (rotatable 360°)
- Adapter for broncolor light shaper available
- Built-in tilt head with locking lever for an optimal breaking effect
- Integrated umbrella holder
- Cooling fan and thermal protection
- Automatic adaptation to the respective mains power supply (after exchange of the halogen modelling lamp)



Picolite small lamp | 32.021.00

| | |
|-------------------------|--|
| Flash energy | max. 1600 J |
| Modelling light (230 V) | halogen max. 150 W |
| Length lamp cable | 3,5 m (11 ft) |
| Dimensions (Ø x L x H) | Ø 8 x 20,5 x 13,5 cm (3,1 x 8 x 5,3") |
| Weight (with cable) | 1,25 kg (2,7 lbs) |
| Stand support | for bolts 12 mm, 3/8" thread and bolts 16 mm |

Accessories

Flash tube 1600 J

34.308.00



Halogen modelling lamp 150 W / 120 V

34.202.00
with fuse



Halogen modelling lamp 150 W / 230 V

34.201.00
with fuse



Protecting glass for Picolite

34.332.00

Protecting glass mat for Picolite

34.335.00



Barn door with 4 wings

33.244.00



Pulso adapter


33.501.00

allows to use lightweight reflectors and accessories of the Pulso range



Attachment with 3 honeycomb grids and 2 aperture masks

33.204.00



Fresnel spot attachment

33.631.00

light angle adjustment range 15 – 35°
incl. mat protecting glass (34.335.00)



Projection attachment

33.641.00

100 mm, with mat protecting glass,
3 aperture masks, 4 integrated templates



Lamp extension cable for MobiLED

34.150.00
3,5 m (11 ft)



Picobox

33.128.00

max. 1600 J
lamp surface 15 x 25 cm (6 x 9,8")
with integrated spring lock



Picolite adapter for Satellite Evolution

35.214.00



Twin articulated arm in 3 parts

35.102.00

Twin articulated arm complete, bolt with 5/8" thread and screw device for bolt adapter, may only be used with stand clamp 32.912.00



Stand clamp for twin articulated arm

32.912.00



New light dimensions

It is not just the form and size of Paras that impresses, but above all their unique light quality and phenomenal light output. Decisive for the creative photographer is that a Para is not just a conventional light shaper, but rather an independent lighting system: various sizes of reflector are available; the position of the lamp is always central, on the axis of the reflector; the angle influences the character of the light; the range includes three diffusers with different densities. In addition Paras can be combined with other accessories. Light-thrilled photographers are always finding new combinations and characteristics with the Para system – it offers a never-ending source of inspiration and creativity.

The Big Ones

The Paras are parabolic reflectors; they have 24 segments, covered with a high-gloss, tear-resistant textile reflector material. The reflector openings have diameters of 88, 177, 222 and 330 cm. All Umbrellas are mainly made of aluminium and carbon-fibre or glass-fibre materials, and so are very light despite their gigantic dimensions. The size also determines the resulting light. The Para 330 FB immerses the whole studio in wonderful light. Even over long distances it remains soft, but without ever seeming “flat”. The light is identical and homogenous over large spaces allowing the model to move freely and spontaneously. The photographer can even stand directly in front of the light source and vary the distance to the model without influencing the light or throwing a shadow. The Para 222 is easily big enough to create typical Para light, even over medium distances of 5 – 8 m. Like its big brother it can be completely defocused, and it demonstrates substantially the same light characteristics. However, over larger distances it becomes spot-like (harder) earlier, but over short distances provides the entire variation spectrum at an earlier stage.

Light from the Para 177 is gradually approaching that from a giant spot. It is slightly more aggressive (needs a supporting fill-in light more often), but on the other hand is also more interesting on structures and has greater brilliance in the highlights. This version cannot be fully defocused to the same extent, i.e. the centre of the reflector is never completely black. The residual light does reduce the three-dimensional effect somewhat, but at the same time works to counter too hard a light mood. In addition the 177 has the big advantage that it can be realistically used in smaller studios and over shorter distances.

Besides the spectacular light shapers 177, 222 and 330 FB, the Para family includes the 88 version. A lightweight, weighing less than 6 kg, this is a fold-up, super compact design. The new Para 88 is even more mobile - perfect for outdoor shootings and smaller studios.

With the broncolor Para family, every shooting is a success. Unbelievable light variability, light, compact, fully compatible with flash and continuous lighting – unlimited possibilities at the highest level.



Para 88 reflector | 33.482.00

| | |
|--|--|
| Allowed max. energy | 3200 J rsp. 650 W HMI |
| F-stop at 2 m / 6 1/2 ft (10 m / 33 ft) distance | 64 ⁹ / ₁₀ [22 ⁸ / ₁₀] |
| Inside coating | silver |
| Dimensions (without stand) | open Ø 85 × 64 cm (34 × 24") closed Ø 20 cm × 83 cm (8 × 33") |
| Weight | 2,8 kg (6,2 lbs) without case |
| Scope of delivery | incl. big bag |



Para 88 P kit* | 33.483.00

| | |
|--|---|
| Allowed max. energy | 3200 J rsp. 650 W HMI |
| F-stop at 2 m / 6 1/2 ft (10 m / 33 ft) distance | focused: 90 [22] defocused: 64 [11] |
| Inside coating | silver |
| Dimensions (without stand) | open with focusing system: Ø 85 cm × 107 cm (33 × 42") closed with focusing system: Ø 32 × 107 cm (13 × 42") |
| Weight | 5,5 kg (12,1 lbs) without case |
| Scope of delivery | Para 88 reflector, focusing system 33.488.00 (with Adapter P), big bag |



*Para 88 P kit also available for HMI F200/F400, ref. 33.483.01

Para 177 P kit* | 33.551.00

| | |
|--|---|
| Allowed max. energy | 3200 J rsp. 1600 W HMI |
| F-stop at 2 m / 6 1/2 ft (10 m / 33 ft distance) | focused: 128 ³ / ₁₀ [45 ⁵ / ₁₀] |
| Inside coating | silver |
| Dimensions (without stand) | open Ø 170 cm × 95 cm (66,9 × 37,4") closed Ø 40 cm × 95 cm (15,7 × 37,4") |
| Weight | 9,5 kg (20,9 lbs) |
| Scope of delivery | Para 177, Adapter P 33.489.00 |



*Para 177 P kit also available for HMI F200/F400, ref. 33.551.01
Para 177 P kit also available without adapter, ref. 33.551.02

Para 222 P kit* | 33.552.00

| | |
|--|---|
| Allowed max. energy | 3200 J rsp. 1600 W HMI |
| F-stop at 2 m / 6 1/2 ft (10 m / 33 ft distance) | focused: 32 ⁵ / ₁₀ [11 ¹ / ₁₀] |
| Inside coating | silver |
| Dimensions (without stand) | open Ø 220 cm × 115 cm (86,6 × 45,3") closed Ø 40 cm × 115 cm (15,7 × 45,3") |
| Weight | 11,5 kg (25,4 lbs) |
| Scope of delivery | Para 222, Adapter P 33.489.00 |



*Para 222 P kit also available for HMI F200/F400, ref. 33.552.01
Para 222 P kit also available without adapter, ref. 33.552.02

Stands and lamps are not included

Para 330 FB | 33.486.00

| | |
|--|---|
| Allowed max. energy | 3200 J |
| F-stop at 2 m / 6 1/2 ft (10 m / 33 ft) distance | focused: 90 ⁸ / ₁₀ [32 ⁹ / ₁₀] |
| Inside coating | silver |
| Dimensions (without stand) | open Ø 330 × 240 cm (130 × 95") closed 32 × 160 cm (12,6 × 63") |
| Weight | 12,1 kg (26,6 lbs) |
| Scope of delivery | incl. suspension ropes (without bag) |



Stands and lamps are not included

Accessories

Focusing system for Para 88
(for reflector 33.482.00)
33.488.02



Tilt head with crank handle for Para / Para FB
33.477.00
recommended when using light
devices over 5 kg (11 lbs)



Light grid 40°
Para 88: 33.221.00



Diffuser no. 1 (small*)
Para 88: 33.472.00 / Para 177: 33.287.00
Para 222: 33.290.00
Para 220 FB: 33.464.00 / Para 330 FB: 33.469.00



Diffuser no. 2 (medium*)
Para 88: 33.473.00 / Para 177: 33.288.00
Para 222: 33.291.00
Para 330 FB: 33.470.00

Diffuser no. 3 (large*)
Para 88: 33.474.00 / Para 177: 33.289.00
Para 222: 33.292.00
Para 330 FB: 33.471.00

Adapter P
33.489.00



Adapter D
33.489.01



Adapter Profoto
33.489.03



Adapter K5600
33.489.05



Adapter Ringflash
33.489.04



*Diffusion degree **Adapter also available for F200/F400, Ref. 33.488.01

The slightly textured open reflectors are characterised by homogeneous light distribution, although a controlled centre emphasis can be achieved using focusable Pulso G lamps.

Standard reflector P70

33.107.00
optimised for Pulso G
and Unilite lamps
Ø 23,2 × 18,4 cm (9,1 × 7,2")



Honeycomb grids for P70

33.207.00
set of 3 pieces (fine, medium, coarse)



Honeycomb grid extremely narrow for P70

33.202.00




Barn door for P70

33.227.00
with 2 wings, with 2 clips to fix diffusers,
filters and masks




Barn door for P70

33.247.00
with 4 wings, with 2 clips to fix diffusers,
filters and masks




Colour filters for P70

33.307.00
set of 12 pieces



Grey and correcting filters for P70

33.317.00
set of 12 pieces



Opal diffusers for P70

33.327.00
set of 12 pieces




Standard reflector P65

33.106.00
optimised for Pulso-Twin
and Pulso 8 lamps
Ø 29,5 × 24 cm (11,6 × 9,4")



Honeycomb grid extremely narrow for P65 and P45

33.211.00




Honeycomb grids for P65, P45 and PAR

33.206.00
set of 3 pieces (fine, medium, coarse)



Barn door with 4 wings for P65, P45 and PAR

33.246.00
with 2 clips to fix diffusers,
filters and masks



Colour filters for P65, P45, PAR and background reflector

33.306.00
set of 12 pieces



PAR Reflector

33.113.00
light angle 48°, with protecting glass UV, mat
Ø 29,5 × 18,3 cm (11,6 × 7,2")



The light angle of each open reflector is apparent from its model designation, optical attachments (such as projection attachment) offer a variable coverage angle.

Background reflector

33.114.00
Ø 12,7 / 19 × 30,3 cm (5 / 7,5 × 11,8")



Narrow angle reflector P50

33.105.00
optimised for Pulso-Twin
and Pulso 8 lamps
Ø 34,5 × 39,4 cm (13,6 × 15,5")



Honeycomb grids for P50

33.205.00
set of 3 pieces (fine, medium, coarse)



Softlight reflector P-Soft

33.110.00
silver inside coating
Ø 51.8 × 19,6 cm (20,4 × 7,7")



Diffuser filter for Softlight reflector P-Soft and Beauty Dish

33.310.00



Beauty Dish reflector

33.111.00
with textile diffusor,
white inside coating,
incl. bag (36.516.00)
Ø 51.8 × 19,6 cm (20,4 × 7,7")



Honeycomb grid for Softlight reflector P-Soft and Beauty Dish

33.210.00




P-Travel reflector

33.103.00
light angle 55°
Ø 19,5 × 9 cm (7,7 × 3,5")



Barn door for P-Travel

33.243.00
with 2 wings



Wide angle reflector P120

33.112.00
Ø 22 × 4,4 cm (8,6 × 1,7")



Spot attachment

33.640.00
with mat protecting glass,
6 aperture masks, 1 gobo holder



Conical snoot

33.120.00
Ø 13,8 / 7,6 × 26,25 cm (5,4 / 2,9 × 10,3")



UV attachment

Ø 18,3 × 14,5 cm (Ø 7,2 × 5,7")
0,74 kg (1,6 lb)
light angle approx. 50°





The broncolor Softboxes are optimised light shapers in 9 different shapes and sizes. Rectangular, square, octagonal and as a strip. These quality, high-performance light shapers extend your flash system and offer countless additional lighting effects. The two diffusers included in the scope of supply enable a soft light with very uniform distribution. With optional light grids and additional diffusers, light control

| Softbox | | | | | | | |
|-----------|-----|---|-----|----|-----|---|--------|
| 33.560.00 | 35 | × | 60 | cm | 1,1 | × | 2 ft |
| 33.561.00 | 60 | × | 60 | cm | 2 | × | 2 ft |
| 33.562.00 | 60 | × | 100 | cm | 2 | × | 3,3 ft |
| 33.563.00 | 100 | × | 100 | cm | 3,3 | × | 3,3 ft |
| 33.564.00 | 30 | × | 120 | cm | 1 | × | 3,9 ft |
| 33.565.00 | 90 | × | 120 | cm | 3 | × | 3,9 ft |
| 33.566.00 | 120 | × | 180 | cm | 3,9 | × | 5,9 ft |

| Octabox | | | |
|-----------|----------|--------|--|
| 33.600.00 | Ø 75 cm | 2,5 ft | |
| 33.601.00 | Ø 150 cm | 4,9 ft | |

| Speedrings for Softbox und Octabox | |
|------------------------------------|---------------------|
| 33.401.00 | broncolor |
| 33.401.01 | Profoto |
| 33.401.02 | Hensel |
| 33.401.03 | Elinchrom |
| 33.401.04 | Bowens |
| 33.401.05 | Multiblitz-Profilux |
| 33.401.06 | Multiblitz-Varilux |
| 33.401.07 | Canon/Nikon |

can be made even more precise. The highly-effective internal coating ensures a high efficiency. Coloured markings on the tensioning rods and on the Speedring enable simple, quick erection and dismantling. With appropriate Speedrings, Softboxes can also be used with flash units from other manufacturers.

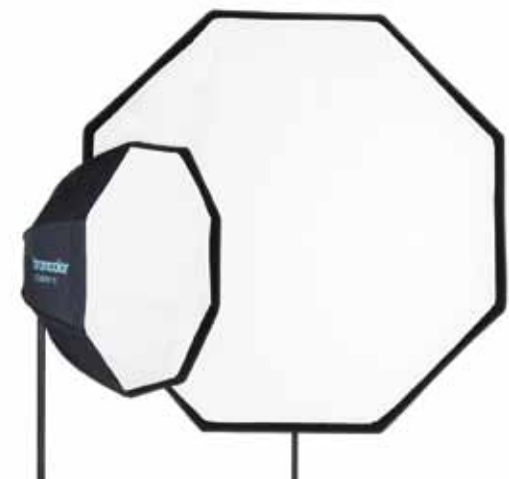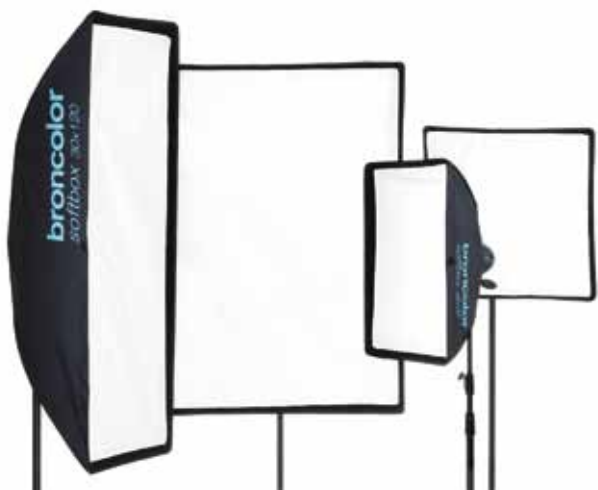

| Additional diffuser for Softbox | | | | | | | |
|---------------------------------|-----|---|-----|----|-----|---|--------|
| 33.590.00 | 35 | × | 60 | cm | 1,1 | × | 2 ft |
| 33.591.00 | 60 | × | 60 | cm | 2 | × | 2 ft |
| 33.592.00 | 60 | × | 100 | cm | 2 | × | 3,3 ft |
| 33.593.00 | 100 | × | 100 | cm | 3,3 | × | 3,3 ft |
| 33.594.00 | 30 | × | 120 | cm | 1 | × | 3,9 ft |
| 33.595.00 | 90 | × | 120 | cm | 3 | × | 3,9 ft |
| 33.596.00 | 120 | × | 180 | cm | 3,9 | × | 5,9 ft |

| Additional diffuser for Octabox | | |
|---------------------------------|----------|--------|
| 33.597.00 | Ø 75 cm | 2,5 ft |
| 33.598.00 | Ø 150 cm | 4,9 ft |

| Light grid 40° for Softbox | | | | | | | |
|----------------------------|-----|---|-----|----|-----|---|--------|
| 33.580.00 | 35 | × | 60 | cm | 1,1 | × | 2 ft |
| 33.581.00 | 60 | × | 60 | cm | 2 | × | 2 ft |
| 33.582.00 | 60 | × | 100 | cm | 2 | × | 3,3 ft |
| 33.583.00 | 100 | × | 100 | cm | 3,3 | × | 3,3 ft |
| 33.584.00 | 30 | × | 120 | cm | 1 | × | 3,9 ft |
| 33.585.00 | 90 | × | 120 | cm | 3 | × | 3,9 ft |
| 33.586.00 | 120 | × | 180 | cm | 3,9 | × | 5,9 ft |

| Light grid 40° for Octabox | | |
|----------------------------|----------|--------|
| 33.587.00 | Ø 75 cm | 2,5 ft |
| 33.588.00 | Ø 150 cm | 4,9 ft |

The classic in lighting composition
broncolor Umbrellas are produced in two sizes and three different versions. Silver, white and translucent, and 85 cm or 105 cm in diameter.

| Umbrella silver | |
|-----------------|-------------------|
| 33.574.00: | Ø 85 cm [2,8 ft] |
| 33.570.00: | Ø 105 cm [3,4 ft] |



| Umbrella white | |
|----------------|------------------|
| 33.573.00: | Ø 85 cm [2,8 ft] |
| 33.571.00: | Ø 105cm [3,4 ft] |



| Umbrella transparent | |
|----------------------|-------------------|
| 33.575.00: | Ø 85 cm [2,8 ft] |
| 33.572.00: | Ø 105 cm [3,4 ft] |



| Umbrella reflector for Pulso G and Unilite lamps and for Minicom | |
|--|--|
| 33.496.00 | |





Thomas Morel, Norway

SPECIAL REFLECTORS

Mini-Satellite

33.152.00
f-stop at 2 m (6 ½ ft) distance,
100 ISO with 3200 J: 180 2/10,
parabolic reflector Ø 60 × 15 cm (23 × 6")
incl. protecting glass mat UV,
additional reflector,
light angle adjustment range
18° – 30° (from 3 m | 10 ft distance)



Unilite holder for Mini-Satellite

35.213.00



Satellite Staro

33.151.00
f-stop at 2 m (6 ½ ft) distance,
100 ISO with 3200 J: 45 2/10,
parabolic reflector
Ø 88 × 25 cm (35 × 14")
incl. mat Plexiglas diffuser,
bracket



Honeycomb grid for Satellite Staro

33.209.00



broncolor Flooter

32.431.00
max. 6400 J
f-stop at 2 m (6 ½ ft) distance,
100 ISO with 3200 J: (15°) 90 2/10
24 × 46 × 52 cm (9,4 × 18 × 20,5")
light angle adjustment range 15° – 70°,
incl. fixing bracket, Fresnel lens



Honeycomb grid
for broncolor Flooter

33.208.00



Barn doors for broncolor Flooter

33.225.00
set of 2 pieces



- Ringflash C**
- Halogen modelling light 200 W
 - A honeycomb set (3 pieces) is available for Ringflash C
 - High-strength UV-coated flash tube (3200 J)
 - Powerful fan cooling and integrated UV-filter
 - Operation possible on all mains power supplies worldwide



Ringflash C | 32.462.XX

| | |
|---------------------------------|--|
| Flash energy | max. 3200 J |
| Modelling light (230 V) | 200 W halogen: 10 × 20 W / 24 V |
| F-stop at 2 m (6 ½ ft), 100 ISO | 45 ¹ / ₁₀ (3200 J) with soft reflector: 45 ⁶ / ₁₀ (3200 J) |
| Cooling | stabilised with 2 fans |
| Dimensions with support (Ø×H×D) | 23,1 × 28,6 × 18 cm (9,1 × 11,3 × 7,1") |
| Weight with cable 5 m (16 ft) | 2,7 kg (6 lbs) |

Ringflash P for Para FB / Ringflash P for Para 88 / 177 / 222

- Halogen modelling lamp 200 W
- High-strength UV-coated flash tube (3200 J) and protecting glass
- Powerful fan cooling and integrated UV-filter
- Operation possible on all mains power supplies worldwide
- In combination with Para FB a perfect front focusing, which enables different light angles and characteristics



Ringflash P for Para FB | 32.461.XX
Ringflash P for Para 88 / 177 / 222 | 32.463.XX

| | |
|--|---|
| Flash energy | max. 3200 J |
| Modelling light (230 V) | 200 W halogen: 10 × 20 W / 24 V |
| f-stop at 2 m (6 ½ ft) distance, 100 ISO with 3200 J | with Para 88: 90 [22] with Para 170 FB / 177: 128 ² / ₁₀ (45 ⁴ / ₁₀) / 128 ³ / ₁₀ (45 ⁵ / ₁₀) with Para 220 FB / 222: 128 ² / ₁₀ (32 ⁷ / ₁₀) / 32 ⁵ / ₁₀ (11 ¹ / ₁₀) with Para Soft 220 FB: 32 ⁸ / ₁₀ (11 ¹ / ₁₀) with Para 330 FB: 90 ⁷ / ₁₀ (32 ⁸ / ₁₀) |
| Cooling | stabilised with 2 fans |
| Dimensions with support (Ø×H×D) | 23,1 × 19,4 × 14 cm (9,1 × 7,6 × 5,5") |
| Weight with cable 5 m (16 ft) | 2,2 kg (4,9 lbs) |
| Support | for Para 88 / 177 / 222 / 170 FB / 220 FB / Soft 220 FB / 330 FB |

Accessories

Halogen modelling lamp

20 W / 24 V: 34.216.00 (230 V)
20 W / 12 V: 34.217.00 (120 V)
for Ringflash C / Ringflash P



Honeycomb grid for Ringflash C

33.219.00
set of 3 pieces (fine, medium, coarse)



Soft reflector for Ringflash C

33.123.00
silver inside coating
incl. UV-coated protecting glass



Beauty reflector for Ringflash C

33.124.00
white inside coating
incl. UV-coated protecting glass



Conversion set for Ringflash C

36.125.00
for conversion to Ringflash P



Conversion set for Ringflash P

36.126.00
for conversion to Ringflash C



Pulso-Spot 4

32.425.XX (5500 K*)
max. 3200 J
37 × 29 × 25 cm (14,5 × 11,4 × 9,8")
f-stop at 2 m (6 ½ ft)
distance, 100 ISO: 90
with fixing bracket, flash tube,
modelling lamp, Fresnel lens
(UV coating), light angle
adjustment range 15° – 40°,
cable 5 m (16 ft)
Weight with cable 8,25 kg (18,2 lb)



Flash tube 3200 J

34.344.00



Halogen modelling lamp 300 W / 230 V

34.223.XX
with fuse



Halogen modelling lamp 250 W / 120 V

34.221.XX
with fuse



**Barn door with 2 wings
for Pulso-Spot 4**

33.224.00



Optical snoot 150 mm for Pulso-Spot 4

33.620.55 (5500 K*)
150 mm (5,9")
with 6 masks, gobo holder,
filter with holder



Templates for spot attachment

33.623.00
for Pulso-Spot 4, set of 4 pieces



Gobo set for spot attachment

33.625.00
for Pulso-Spot 4, set of 12 pieces



Sunlite Set for Pulso G / Unilite

33.162.00 (5500 K*)
max. 3200 J, f-stop at 2 m (6 ½ ft) distance, 100 ISO: 22 ⁸/₁₀
comprises:
1 U-shaped special flash tube, 1 clear protecting glass,
1 mat protecting glass, 1 barn door with 4 wings,
for effects similar to UV-sunlight



Litestick

32.451.00 (5500 K*)
max. 3200 J, 5,5 × 57 cm (2,1 × 22,4"), f-stop at 2 m (6 ½ ft) distance,
100 ISO: 45.7 (with reflector), 32 ⁷/₁₀ (without reflector),
with flash tube, removable reflector, stand adapter, cable 3,5 m (11 ½ ft)



Balloon

33.161.00
max. 3200 J
for Pulso G and Unilite lamps, monolights,
acrylic glass sphere, opal, Ø 50 cm (20"),
with black plastic socket and Pulso bayonet



*guarantees neutral colour reproduction

Lightbar 60 Evolution

32.351.XX (5500 K)
Flash energy max. 3200 J
f-stop at 2 m (6 ½ ft) distance, 100 ISO: 32 ⁵/₁₀
with "tunnel-shaped" Plexiglas diffuser,
interchangeable tilt head, fan, 2 flash tubes,
10 modelling lamps 20 W, cable 5 m (16 ft)
Dimensions (L×W×H) 58 × 12 × 13 cm (23 × 5 × 5")
Weight 3,6 kg (8 lbs)



Barn doors for Lightbar /
Striplite 60 Evolution

33.228.00




Plexiglas cap mat,
for Lightbar 60 Evolution

33.272.00



Striplite attachment
for Lightbar 60 Evolution

33.274.00




Lightbar 120 Evolution

32.353.XX (5500 K)
Flash energy max. 3200 J
f-stop at 2 m (6 ½ ft) distance, 100 ISO: 45 ⁵/₁₀
with "tunnel-shaped" Plexiglas diffuser,
interchangeable tilt head, fan, 4 flash tubes,
20 modelling lamps 20 W, 2 cables 2 × 5 m (16 ft)
Dimensions (L×W×H) 112 × 12 × 13 cm (44 × 5 × 5")
Weight 6,8 kg (15 lbs)



Barn doors for Lightbar /
Striplite 120 Evolution

33.229.00




Plexiglas cap mat,
for Lightbar 120 Evolution

33.273.00



Striplite attachment
for Lightbar 120 Evolution

33.275.00



Striplite 60 Evolution

32.301.XX (5500 K)
Flash energy max. 3200 J
f-stop at 2 m (6 ½ ft) distance, 100 ISO: 32 ¹/₁₀
with Plexiglas diffuser, interchangeable tilt head,
fan, 2 flash tubes, 10 modelling lamps 20 W,
cable 5 m (16 ft)
Dimensions (L×W×H) 58 × 12 × 13 cm (23 × 5 × 5")
Weight 3,6 kg (8 lbs)



Barn doors for Lightbar /
Striplite 60 Evolution

33.228.00



Lightbar attachment,
Plexiglas cap mat,
for Striplite 60 Evolution

33.272.00



Honeycomb grid
for Striplite 60 attachment

33.217.00



Striplite 120 Evolution

32.303.XX (5500 K)
Flash energy max. 3200 J
f-stop at 2 m (6 ½ ft) distance, 100 ISO: 45
max. 2 × 3200 J, with Plexiglas diffuser,
interchangeable tilt head, fan, 4 flash tubes,
20 modelling lamps 20 W, 2 cables 2 × 5 m (16 ft)
Dimensions (L×W×H) 112 × 12 × 13 cm (44 × 5 × 5")
Weight 6,8 kg (15 lbs)



Barn doors for Lightbar /
Striplite 120 Evolution

33.229.00



Lightbar attachment,
Plexiglas cap mat,
for Striplite 120 Evolution

33.273.00



Honeycomb grid
for Striplite 120 Evolution

33.218.00



Accessories

Halogen modelling lamp 20 W / 24 V

34.216.00
for Lightbar / Striplite 60 / 120 Evolution
230 V



Halogen modelling lamp 20 W / 12 V

34.217.0
for Lightbar / Striplite 60 / 120 Evolution
120 V



Boxlite 40

32.341.XX (5500 K)
Flash energy max. 3200 J
f-stop at 2 m (6 ½ ft) distance,
100 ISO: 22 ³/₁₀ (1600J)
with 2 flash tubes, 4 modelling lamps,
quick change head, cable 5 m (16 ft)
Dimensions (L×W×H) 30 × 40 × 15 cm (11,8 × 15,7 × 5,9")
(measurements without quick change head)
Weight 4,1 kg (9 lbs)



Modelling lamp 40 W for Boxlite 40

34.211.XX



Hazylight-Soft

33.513.00
f-stop at 2 m (6 ½ ft) distance,
100 ISO: 45 (3200J)
with white inside coating,
bracket and ring,
for Pulso G and Unilite lamps
Dimensions (L×W×H) 104 × 104 × 43 cm
(40 × 40 × 17"),
Weight 16,9 kg (37,3 lbs)



Honeycomb grid for Hazylight-Soft

33.215.00



| | | | |
|---|---|---|--|
| | | RFS 2 | |
| | |  | |
| Number of work stations | 99 | | |
| Number of frequency channels | 40 | | |
| Frequency | 2,4 GHz | | |
| Transmission time (transmitter to receiver) | 0,425 µs | | |
| Operating distance outdoors | up to 200 m (656 ft) | | |
| Operating distance in closed rooms | up to 50 m (164 ft) | | |
| Max. trigger sequence per second | 100 | | |
| Power supply | RFS 2 transmitter: 3 V CR2450 battery RFS 2 receiver: USB power supplier | | |
| Dimensions (L×W×H) | 6,8 × 3,9 × 2,5 cm (2,7 × 1,5 × 1") | | |
| Weight (incl. battery) | 43 g (0,09 lb) | | |
| | | RFS 2 transmitter kit 36.133.00 | |
| Comprises | 1 transceiver, 1 lithium button cell CR 2450, 1 sync cable for camera, 1 sheath | | |
| | | RFS 2 receiver kit 36.134.00 | |
| Comprises | 1 transceiver, 1 base plate, 1 lithium button cell CR 2450, 1 sync cable for camera, 1 sync cable for flash unit, 1 USB power supplier for receiver-operation (incl. supplier), 1 car charging cable, 1 USB cable, 1 sheath | | |
| | | RFS 2 transmitter / receiver kit 36.135.00 | |
| Comprises | 2 transceivers, 1 base plate, 1 lithium button cell CR 2450, 1 sync cable for camera, 1 sync cable for flash unit, 1 USB power supplier for receiver-operation (incl. supplier), 1 car charging cable, 1 USB cable, 2 sheaths | | |
| | | RFS transmitter 36.130.00 | |
| | |  | |
| Comprises | Transmitter with lithium button cell, 1 sync cable | | |
| Power regulation | in 1/1 and 1/10 f-stops | | |
| Number of frequency channels | 10 | | |
| Operational distances: outdoors | 30 – 50 m (98 – 164 ft) | | |
| Operational distances: in closed rooms | 20 – 30 m (65 – 98 ft), possible range up to 300 m (984 ft) | | |
| Dimensions (L×W×H) | 7,2 × 4,7 × 5,7 cm (2,5 × 1,8 × 2,2") | | |
| Weight | 55 g (0,12 lbs) | | |
| | | RFS transceiver 36.131.00 | |
| | |  | |
| Comprises | Transceiver with base plate, 1 USB connection cable, 1 sync cable, 1 data carrier with software | | |
| Power regulation | in 1/1 and 1/10 f-stops | | |
| Number of frequency channels | 10 | | |
| operational distances: outdoors | 30 – 50 m (98 – 164 ft) | | |
| in closed rooms | 20 – 30 m (65 – 98 ft), possible range up to 300 m (984 ft) | | |
| Dimensions (L×W×H) | 8 × 5,6 × 5,2 cm (3,1 × 2,1 × 2") | | |
| Weight | 105 g (0,23 lbs) | | |
| System requirements | requires a serial USB interface | | |
| Computer requirements | Apple Macintosh with OS 8.6 or higher (OS 9.1 or higher recommended), OS X, approx. 5 MB free memory space, or PC with Microsoft Windows 98 / WinMe / Win2000 / Windows XP / Vista, USB interface, approx. 5 MB free memory space | | |
| | | IRX 2 36.116.00 | |
| | |  | |
| | | Infrared transmitter with 2 channels for cordless triggering, range approx. 50 m (160 ft), with 1 sync cable and 2 batteries 1.5 V | |

RFS 2 is not compatible with RFS

| | | Monolight Minicom 40 / 80 / 160 | Litos lamp / MobiLED | Unilite lamp | Pulso G lamp | Pulso-Twin lamp | Picolite with Pulso adapter | Ringflash P lamp | broncolor HMI F200 | broncolor HMI F400 | broncolor HMI F575.800 |
|-----------------------------|-----------------------------------|------------------------------------|----------------------|--------------|--------------|-----------------|-----------------------------|------------------|--------------------|--------------------|------------------------|
| Reflectors | Standard reflector P70 | ● | ● | ● | ● 3 | ● | ● | | ● | ● | ● 4 |
| | Standard reflector P65 | ● 1 | ● 1 | ● 1 | ● 3 | ● | ● | | ● | ● | ● 4 |
| | Narrow angle reflector P45 | ● | ● | ● | ● 3 | ● | ● | | ● | ● | ● |
| | Narrow angle reflector P50 | ● 1 | ● 1 | ● 1 | ● 3 | ● | ● | | ● | ● | ● 3 |
| | Softlight reflector P | ● | ● | ● | ● | | ● | | ● | ● | ● |
| | Beauty Dish reflector | ● | ● | ● | ● | | ● | | ● | ● | ● |
| | Wide angle reflector P120 | ● | ● | ● | ● | ● | ● | | ● | ● | ● |
| | PAR reflector | ● 8 | ● 8 | ● 8 | ● 8 | | | | ● | ● | ● |
| | P-Travel reflector | ● | ● | ● | ● | ● | ● | | ● | ● | ● |
| | Conical snoot | ● | ● | ● | ● | ● | ● | | ● | ● | |
| | UV attachment | ● | ● | ● | ● | ● 5 | | | ● 9 | ● | ● |
| | Umbrella reflector | ● | ● | ● | ● | ● | | | ● | ● | |
| | Spot attachment | ● | ● | ● | ● | | | | ● | ● | ● |
| | Sunlite-Set | ● | ● | ● | ● | | | | | | |
| | broncolor Flooter | ● | ● | ● | ● | ● 2 | | | ● 2 | ● 2 | ● |
| | Satellite Evolution | | | ● 7 | ● | | ● 6 | | ● | ● | ● |
| | Mini-Satellite | | | ● 7 | ● | ● | ● 6 | | ● | ● | ● |
| | Satellite Staro | ● | ● | ● | ● | ● 5 | ● 1 | | ● | ● | ● |
| | Para 170 / 220 / 330 FB | | ● | ● | ● | ● | ● | ● | ● | ● | ● |
| | Para 88 P kit / Para 88 reflector | ● 10 | ● | ● | ● | ● | ● | ● | ● 9 | ● 9 | ● |
| | Para 177 / 222 | ● 10 | ● | ● | ● | ● | ● | ● | ● 9 | ● 9 | ● |
| Softboxes | 35 × 60 | ● | ● | ● | ● | ● | ● 1 | | ● | ● | ● |
| | 60 × 60 | ● | ● | ● | ● | ● | ● 1 | | ● | ● | ● |
| | 60 × 100 | ● | ● | ● | ● | ● | ● 1 | | ● | ● | ● |
| | 100 × 100 | ● | ● | ● | ● | ● | ● 1 | | ● | ● | ● |
| | 30 × 120 | ● | ● | ● | ● | ● | ● | | ● | ● | ● |
| | 90 × 120 | ● | ● | ● | ● | ● | ● | | ● | ● | ● |
| | 120 × 180 | ● | ● | ● | ● | ● | ● | | ● | ● | ● |
| Softbox Flex | 70 × 70 | ● | ● | ● | ● | ● | ● | | ● | ● | ● |
| Octaboxes | Ø 75 | ● | ● | ● | ● | ● | ● 1 | | ● | ● | ● |
| | Ø 150 | ● | ● | ● | ● | ● | ● 1 | | ● | ● | ● |
| Special effect lamps | Balloon | ● | | ● | ● | ● | ● | | ● | ● | ● |
| | Hazylight-Soft | | | ● | ● | | | | ● | ● | ● |
| | Litepipe | | | | | | | | | ● | |

- recommended combination

● not recommended combination

● **use forbidden!**

1 centre-focus light

2 non-optimized illumination
- 3 adjustable illumination, heavily centre-focused till uniform

4 adjustable illumination, centre-focused till uniform

5 up to 3200 J

6 with mat protecting glass and adapter 35.214.00
- 7 with Unilite holder 35.213.00

8 with mat protecting glass 34.340.00

9 in combination with 33.489.01

10 in combination with 33.489.00

Junior stand AC

35.100.00
air cushioned (AC), with 2 height extensions, adjustable from 90 to 250 cm (3 – 8 ft), and 3/8" threaded bolt 16 mm, weight 1,25 kg (2,7 lbs)



Senior stand AC

35.110.00
air cushioned (AC), with 2 height extensions, adjustable from 110 to 260 cm (3,6 – 8,1 ft), and 3/8" threaded bolt 16 mm, weight 2,1 kg (4,6 lbs)



XXL stand AC

35.114.00
air cushioned (AC), with 3 height extensions as well as stand casters, adjustable from 144 – 455 cm (4,7 – 14,9 ft), stand mount 28 mm (1,1"), 3/8" threaded bolt 16 mm, weight 8 kg (17,6 lbs)



Mini-Flamingo stand

35.170.00
stand on casters with platform for power pack as counter-weight, crank handle and cable suspension, arm length 107 cm (3,4 ft), max. height 260 cm (8,5 ft), incl. broncolor threaded bolt, lamp adapter and angle adapter, weight 24 kg (53 lbs)



Flamingo stand

35.210.00
stand on casters with platform for power pack and container for counter-weight, crank handle and cable suspension, arm length 150 cm (5 ft), max. height 325 cm (10 ft) weight 43 kg (95 lbs)



Super boom

35.140.00
boom arm with counter-weight, length 210 cm (7 ft), with holder (35.146.00) for steel stand weight 9,9 kg (22 lbs)



Hazylight stand

35.200.00
stand on casters with platform for power pack, counter-weight and cable suspension arm 85 cm (2,6 ft) max. height 270 cm (9 ft) weight 38 kg (84 lbs)



Casters for Senior stand

35.111.00
set of 3 pieces



Bag for stands, empty for 3 Junior stands

36.551.00



Bag for stands, empty for 3 Senior stands

36.552.00



Threaded nipple (A)

25.200.00
with 3/8" external and internal thread
for stands of other brands



Threaded bolt (B)

25.210.00
with 3/8" external thread
for Junior and Senior stand



Pulso lamp holder (C)

35.146.00
for Super-boom



Striplite holder (D)

35.216.00
for Flamingo stand



Bolt for quick change head (E)

35.298.00
with 3/8" external and internal thread
for stands of other brands, broncolor fit



Bolt for quick change head (F)

35.299.00
for stands of other brands, Foba fit with spigot inset of 18 mm diameter and 3/8" external and internal thread



Threaded bolt (G)

35.409.00
with 3/8" external and internal thread
for Mini-Hazylight stand for Unilite and Pulso lamps



Threaded bolt (H)

35.504.00
with 3/8" external thread
for pantograph for Unilite and Pulso lamps



Double bolt (I)

35.297.00
Ø 16 mm



Threaded bolt for Junior / Senior stand

35.507.00



Recommended fastening of stand

| | Para FB 330 | Para 177 / 222 | Para 88 P kit | Para 88 reflector | Litos MobilED | Unilite | Minicom 40/80/160 Minipuls C200 | Lamps Pulso G and Pulso Iwin | broncolor HMI F575.800 | broncolor HMI F200 / F400 | broncolor Flooter | Pulso-Spot 4 | Boxlite | Hazylight-Soft | Lightbar / Striplite 60 Evolution | Lightbar / Striplite 120 Evolution | Satellite Evolution and Staro | Picolite / Liteslick |
|-------------------------------|-------------|----------------|---------------|-------------------|---------------|---------|---------------------------------|------------------------------|------------------------|---------------------------|-------------------|--------------|---------|----------------|-----------------------------------|------------------------------------|-------------------------------|----------------------|
| Junior stand 35.100.00 | | | ● | ● | ● | ● | ● | ● | ● | ● | ● | ● | ● | | ● | ● | ● | ● |
| Senior stand 35.110.00 | | | ● | ● | ● | ● | ● | ● | ● | ● | ● | ● | ● | | ● | ● | ● | ● |
| XXL Stand 35.114.00 | ● | ● | ● | ● | ● | ● | ● | ● | E | ● | ● | ● | ● | ● | E | E | ● | ● |
| Super boom 35.140.00 | | | | ● | | | | C | C | | | | C | | C | ● | | C |
| Mini-Flamingo stand 35.170.00 | | ● | ● | ● | | G | G | G | G | | G | ● | | | | ● | ● | G |
| Flamingo stand 35.210.00 | | | | | | | | | | | | | | | | | | |
| Hazylight stand 35.200.00 | | | | | | | | | | | | | | ● | | | | |
| with 3/8" thread | | | | | | E | E | E | E | | E | E | E | | E | E | E | E |
| with spigot Ø 16 mm | | | I | I | | H, I | H, I | H, I | H | | H | H | H | | H, I | H, I | H | H, I |
| with spigot Ø 18 mm | | | | | | F | F | F | F | | F | F | F | | F | F | F | F |
| with spigot Ø 28 mm | ● | ● | ● | ● | | | | | | | ● | ● | ● | | | | ● | |
| with 3/8" (12 mm) spigot | | | | | ● | ● | ● | ● | ● | ● | ● | ● | ● | | | | | |

Stands of other brands

● No further holder necessary A-I Holder necessary ● Fastening is not recommended

broncolor lamps and monolights are supplied with flash tube 5900 K, halogen modelling lamp, UV-coated protecting glass 5500 K (guarantees neutral colour reproduction) and transparent protection cap.
You will find all the spare parts on www.broncolor.com

Minicom 40 / 80 (Page 27)

| | |
|---|--|
| Flash tube 600 J 34.307.00 |  |
| Halogen modelling lamp 300 W / 120 V 34.234.XX with fuse |  |
| Halogen modelling lamp 300 W / 230 V 34.233.XX with fuse |  |
| Protecting glass 34.336.00 |  |
| Protecting glass, mat 34.337.00 |  |

Minicom 160 (Page 27)

| | |
|---|---|
| Flash tube 1500 J 34.310.00 |  |
| Halogen modelling lamp 300 W / 120 V 34.225.XX with fuse |  |
| Halogen modelling lamp 650 W / 230 V 34.226.XX with fuse |  |
| Protecting glass 34.336.00 |  |
| Protecting glass, mat 34.337.00 |  |







Unilite, Pulso G (Page 31)

| | |
|---|---|
| Flash tube 1600 J 34.322.00 |  |
| Flash tube 3200 J 34.324.00 |  |
| Halogen modelling lamp 300 W / 120 V 34.225.XX Pulso G / 34.234.XX Unilite with fuse |  |
| Halogen modelling lamp 650 W / 230 V 34.226.XX Pulso G / 34.235.XX Unilite with fuse |  |
| Protecting glass 34.336.00 |  |
| Protecting glass, mat 34.337.00 |  |

Pulso Twin (Page 33)

| | |
|---|---|
| Flash tube 2 × 3200 J 34.327.00 incl. protecting glass |  |
| Halogen modelling lamp 650 W / 230 V 34.226.XX with fuse |  |
| Halogen modelling lamp 250 W / 120 V 34.221.XX with fuse |  |



Picolite (Page 34)

| | |
|--|---|
| Flash tube 1600 J 34.308.00 |  |
| Halogen modelling lamp 150 W / 230 V (Picolite) 34.201.00 with fuse |  |
| Halogen modelling lamp 150 W / 120 V (Picolite) 34.202.00 with fuse |  |
| Halogen modelling lamp 100 W / 12 V 34.203.00 with fuse |  |
| Protecting glass 34.332.00 |  |
| Protecting glass, mat 34.335.00 |  |

Litos (Page 32)

| | |
|---|---|
| Flash tube 2400 J 34.313.00 |  |
| Halogen modelling lamp 300 W / 230 V 34.233.XX with fuse |  |
| Protecting glass 34.339.00 |  |
| Protecting glass, mat 34.340.00 |  |


Ringflash P / C (Page 46) Lightbar / Striplite (Page 48 – 49)

| | |
|---|---|
| Halogen modelling lamp 20 W / 24 V 34.216.00 230 V |  |
| Halogen modelling lamp 20 W / 12 V 34.217.00 120 V |  |




Pulso Spot 4 (Page 47)

| | |
|---|---|
| Flash tube 3200 J 34.344.00 |  |
| Halogen modelling lamp 250 W / 120 V 34.221.XX with fuse |  |
| Halogen modelling lamp 300 W / 230 V 34.223.XX with fuse |  |

Boxlite 40 (Page 49)

| | |
|---|---|
| Modelling lamp 40 W 34.211.XX |  |
|---|---|

MobiLED (Page 32)

| | |
|---|---|
| Flash tube 1600 J 34.308.00 |  |
| Protecting glass 34.339.00 |  |
| Protecting glass, mat 34.340.00 |  |



Continuous lighting is a very special chapter for everyone active in the photography and film sectors. broncolor HMI is the solution. Continuous light sources are an alternative or a powerful supplement to natural daylight. Game-changing technology and many year's knowledge and experience are the features of broncolor HMI continuous lighting. The latest circuits and high-quality components guarantee high functionality and reliability even under difficult conditions.

The extremely small size of the arc enables light control of hitherto unattainable precision. The broncolor HMI lamp has a fitting on one side only. A crucial prerequisite for slow-motion filming and filming with a high-speed camera is electronically stabilised and totally flicker-free lighting. The same applies for perfect images with electronic scanner cameras. In combination with "WYSIWYG" (What You See Is What You Get), the optimum requirements for perfect digital photography and subsequent image processing. The broncolor HMI F575.800 lamp is equipped with the proven Pulso bayonet fitting with unlocking button. Reflectors can be changed quickly and rotated through 360°. The large range of accessories includes most Pulso reflectors, floodlights, the HMI version of Pulsoflex, and various diffused-source lamps.

With the adapter included in the scope of supply of the F200 and F400 lamps, a large selection of broncolor reflectors and also Chimera® Video Pro Softboxes can be mounted directly, in exactly the same way as with the F575.800 lamp. Photographers can thus use their usual light shapers even with this continuous light source.

broncolor HMI uses normal, commercially available lamps. The broncolor high-power ignition stage ensures that they will fire again immediately, even when they are still hot. This means that full lighting is available at any time - no waiting! broncolor HMI has triple security. An electronically monitored protective glass, a thermal cutout, and a control for the protective earth guarantee the highest operational reliability. A broncolor HMI lamp gives three times as much light as a halogen light with nominally the same power. In spite of their light output, HMI lamps are compact and light. The 200 Watt version of the starter and lamp weigh less than 3 kg together, and are easy to transport.

In photography the broncolor HMI is the ideal chaser light for illuminating larger rooms for long exposures. As a continuous light source with daylight colour temperature, they offer the optimum conditions for creating wipe effects – as if out of doors. broncolor HMI, continuous lighting that sets the tone.



F200 | 42.105.XX



F400 | 42.106.XX



F575.800 | 42.104.XX

| | | | |
|---------------------------------------|--|--|---------------------------------------|
| Power output | 200 W | 400 W | 575 / 800 W |
| F-stop at 2 m (6 ½ ft), 100 ISO, 1/60 | 8 7/10 (Open Face) | 11 8/10 (Open Face) | 8 / 8 5/10 (reflector P70) |
| Focusing | yes | yes | yes |
| Weatherproof (IP 54*) | yes | yes | – |
| broncolor light shaper connection | with adapter | with adapter | integrated |
| Mains voltage | 85 – 265 V | 90 – 265 V | 90 – 265 V |
| Cable length | 5 m (16 ft) | 6 m (19,7 ft) | 3,5 m (11,5 ft) |
| Dimensions (L×W×H) | 13 × 14,2 × 14,2 cm (5,1 × 5,6 × 5,6") | 13,9 × 14,2 × 16,7 cm (5,5 × 5,6 × 6,6") | 32 × 12 × 19,8 cm (12,6 × 4,7 × 7,8") |
| Weight | 1,2 kg (2,6 lbs) | 1,4 kg (3 lbs) | 2,6 kg (5,7 lbs) |

*with Open Face and PAR reflector

Electronic Ballast units

HMI 200

41.103.XX

Electronic ballast unit for the daylight lamp / fixture broncolor HMI F200; flicker-free operation, dimmer 100% – 60%, thermal protection, splash water protection (IP 43), automatic adaptation to the respective mains voltage from 90 V – 265 V, with mains cable
Output: 200 W
Dimensions (L×W×H): 23,5 × 16 × 8,5 cm (9,2 × 6,3 × 3,3")
Weight: 1,7 kg (3,7 lbs)



HMI 400.575.800

41.102.XX

Electronic ballast unit for the daylight lamps / fixtures broncolor HMI F400 or F575.800; flicker-free operation, dimmer 100% – 60%, thermal protection, splash water protection (IP 43), recognition of the set power level of the connected lamp (fixture), automatic adaptation to the respective mains voltage from 90 V – 265 V, with mains cable
Output: 400 / 575 / 800 W
Dimensions (L×W×H): 26,7 × 18,4 × 11,2 cm (10,6 × 7,2 × 4,4")
Weight: 2,6 kg (5,7 lbs)



broncolor HMI daylight units are also available in kits. The complete kits have a large assortment and are also reliable on location, easily transportable and have powerful light sources.

HMI 200 Starter kit

41.111.XX
comprises:
1 lamp / fixture HMI F200 incl. lamp / bulb, 1 electronic ballast unit HMI 200,
1 Open Face reflector, 1 4-leaf barn door for Open Face, 1 diffusion filter,
1 conversion filter, 1 light "schott ring", 1 bag for 5 lenses or filter,
1 adapter for broncolor light shaper, 1 adapter ring (speedring) Ø 169 mm (6 5/8"),
1 softbox "Video Pro XS" 40 × 55 cm (15.7 × 21.6"), 1 bag



HMI 400 Starter kit

41.112.XX
comprises:
1 lamp / fixture HMI F400 incl. lamp / bulb, 1 electronic ballast unit HMI 400.575.800,
1 Open Face reflector, 1 4-leaf barn door for Open Face, 1 diffusion filter,
1 conversion filter, 1 light "schott ring", 1 bag for 5 lenses or filter,
1 adapter for broncolor light shaper, 1 adapter ring (speedring) Ø 169 mm (6 5/8"),
1 softbox "Video Pro XS" 40 × 55 cm (15.7 × 21.6"), 1 bag




HMI 200 Crossover kit

41.113.XX
comprises:
1 lamp / fixture HMI F200 incl. lamp / bulb, 1 electronic ballast unit HMI 200,
1 adapter for broncolor light shaper, 1 adapter ring (speedring) Ø 169 mm (6 5/8"),
1 softbox "Video Pro XS" 40 × 55 cm (15.7 × 21.6"), 1 bag



HMI 400 Crossover kit

41.114.XX
comprises:
1 lamp (fixture) HMI F400 incl. lamp (bulb), 1 electronic ballast unit HMI 400.575.800,
1 adapter for broncolor light shaper, 1 adapter ring (speedring) Ø 169 mm (6 5/8"),
1 softbox "Video Pro XS" 40 × 55 cm (15.7 × 21.6"), 1 bag

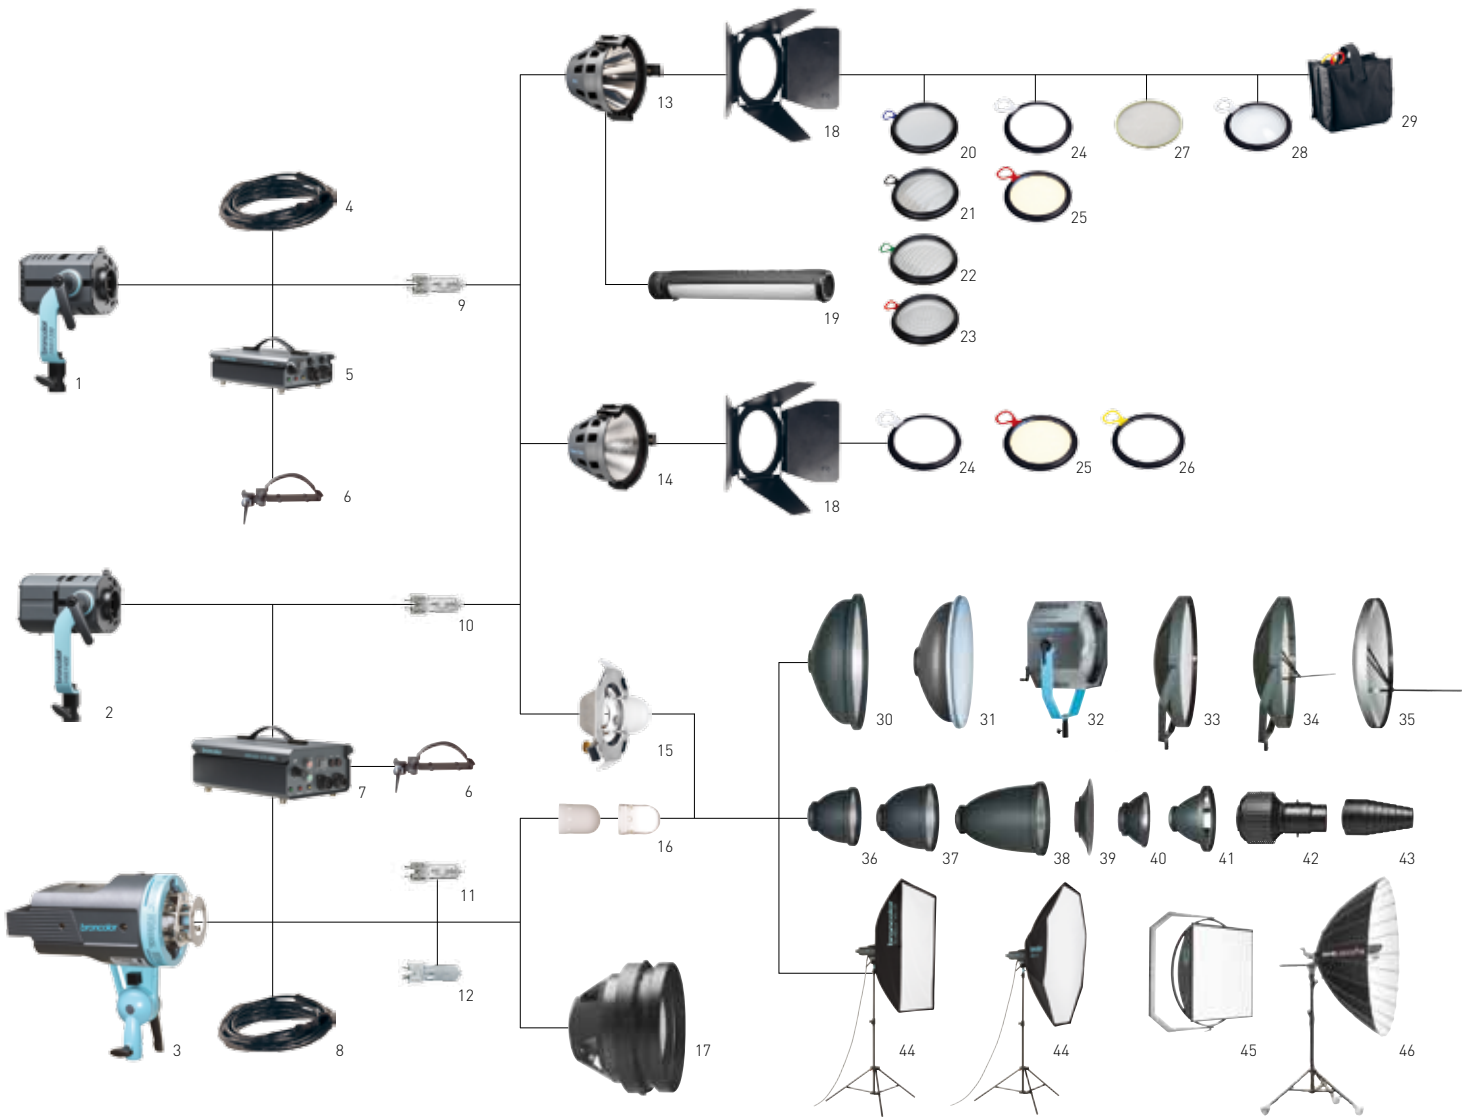

| | | | | | |
|---|-----------|------------------------------------|-----------|--------------------------------|-------------|
| 1 Lamp / fixture F200 | 42.105.00 | 17 Reflector PAR F575.800 (5500 K) | 43.103.55 | 29 Bag for lenses for HMI F200 | 43.110.00 |
| 2 Lamp / fixture F400 | 42.106.00 | Reflector PAR F575.800 (5900 K) | 43.103.59 | Bag for lenses for HMI F400 | 43.115.00 |
| 3 Lamp / fixture F575.800 | 42.104.00 | 18 4-leaf barn door for F200 | 43.106.00 | Bag for lenses for F200 | 43.130.00 |
| 4 Lamp extension cable for HMI 200 | 44.201.00 | 4-leaf barn door for F400 | 43.105.00 | Bag for lenses for F400 | 43.131.00 |
| 5 Ballast unit HMI 200 | 41.103.XX | 19 Litepipe (for F400) | 43.118.00 | 30 Softlight reflector P-Soft | 33.110.00 |
| 6 Stand holder | 35.118.00 | 20 PAR lens NSP for F200 | 43.119.00 | 31 Beauty-Dish reflector | 33.111.00 * |
| 7 Ballast unit HMI 400.575.800 | 41.102.XX | PAR lens NSP for F400 | 43.120.00 | 32 Flooter | 32.431.00 * |
| 8 Lamp extension cable for HMI 400.575.800 | 44.202.00 | 21 PAR lens MFL for F200 | 43.121.00 | 33 Satellite Staro | 33.151.00 |
| 9 200 W lamp / bulb | 44.105.00 | PAR lens MFL for F400 | 43.122.00 | 34 Satellite Evolution | 33.150.00 * |
| 10 400 W lamp / bulb | 44.106.00 | 22 PAR lens WFL for F200 | 43.123.00 | 35 Mini-Satellite | 33.152.00 * |
| 11 575 W lamp / bulb | 44.100.00 | PAR lens WFL for F400 | 43.124.00 | 36 P70 reflector | 33.107.00 |
| 12 800 W lamp / bulb | 44.104.00 | 23 PAR lens VWFL for F200 | 43.125.00 | 37 P65 reflector | 33.106.00 |
| 13 Reflector PAR F200 | 43.116.00 | PAR lens VWFL for F400 | 43.126.00 | 38 P45 narrow angle reflector | 33.104.00 |
| Reflector PAR F400 | 43.117.00 | 24 Diffusion filter for F200 | 43.107.00 | 39 P120 wide angle reflector | 33.112.00 |
| 14 Reflector Open Face F200 | 43.104.00 | Diffusion filter for F400 | 43.112.00 | 40 Reflector P-Travel | 33.103.00 |
| Reflector Open Face F400 | 43.111.00 | 25 Conversion filter for F200 | 43.108.00 | 41 Reflector PAR | 33.113.00 |
| 15 Adapter for broncolor light shaper and Chimera Softbox Video Pro | 33.502.00 | Conversion filter for F400 | 43.113.00 | 42 Projection attachment | 33.640.00 * |
| 16 Protecting glass HMI F575.800 clear | 44.101.55 | 26 Light schott ring for F200 | 43.109.00 | 43 Conical Snoot | 33.120.00 * |
| mat | 44.102.55 | Light schott ring for F400 | 43.114.00 | 44 Softbox / Octabox | * |
| | | 27 Scrim ring for F400 | 43.127.00 | 45 Hazylight-Soft | 33.513.00 * |
| | | 28 Fresnel lens for F200 | 43.128.00 | 46 Paras | * |
| | | Fresnel lens for F400 | 43.129.00 | | |

*1 = on request *2 = with restrictions (see p. 51)

Sync cable

34.111.00: 5 m (16 ft)
34.112.00: 10 m (32 ft)



Light bag

36.518.00
for Senso kit, Minicom Basic kit,
Starter kit, Crossover kit, HMI kits
53 × 18 × 40 cm (21 × 7 × 16")



Lamp cable per running meter

34.159.00 Pulso G / Unilite
34.160.00 MobiLED



Big bag

36.517.00
for Minicom Classic / Location / Expert / Pro kit,
Minipuls Location kit 2 / 3 / Para 88
96 × 45 × 26 cm (38 × 18 × 10")



**Lamp extension cable
for Picolite / MobiLED**

34.150.00: 3,5 m (11 ft)



Beauty Dish bag

36.516.00
54 × 22 cm (21 × 8,5")



**Lamp extension cable
for lamps up to max. 3200 J**

34.151.00: 5 m (16 ft)
34.152.00: 10 m (32 ft)



**Bag for 3 Junior stands
or 3 diffusers for Para / Para FB**

36.551.00
36.552.00 (3 Senior stands)



Extension cable Litos

34.153.00: 5 m (16 ft)
34.154.00: 10 m (32 ft)



Outdoor trolley backpack

36.519.00



Pulso wall adapter

36.900.00
(with bayonet)



Protecting case for Move

36.520.00



© Glen Burrows, Great Britain



Compatibility, getting started, expansion

The broncolor modular system includes monolights, power packs, lamps and accessories, which are mutually compatible. This facilitates the start with the broncolor system, as you always will be able to enlarge it step by step and adopt it to your individual requirements. Combination with earlier broncolor equipment is virtually unrestricted.

The broncolor system

Output, easy to handle, microprocessor control system, and quick flash series – no matter what criterion makes you buy a flash system. Amongst the broncolor system you will find the units completely in line with your lighting requirements. They let you advance into new applications and succeed with motion shots. Various lamps and a wide selection of reflectors, area lights and accessories give you ample latitude in your visions of lighting and creativity.

Warranty

All broncolor equipment is characterised by high quality standards. All equipment – with the exception of flash tubes, modelling lamps, rechargeable batteries, textiles and parts subject to wear – carry a 2-year warranty.

Ordering power supplies

broncolor equipment can be supplied for various voltages and frequencies. Please replace the last two digits “XX” of the item number by the code number for your rated voltage.

| Power supply | Code |
|--------------|------|
| 100 V 50 Hz | .01 |
| 100 V 60 Hz | .02 |
| 110 V 50 Hz | .03 |
| 110 V 60 Hz | .04 |
| 115 V 50 Hz | .05 |
| 115 V 60 Hz | .06 |
| 117 V 60 Hz | .07 |
| 120 V 60 Hz | .08 |
| 220 V 50 Hz | .10 |
| 230 V 50 Hz | .11 |
| 240 V 50 Hz | .12 |
| 240 V 60 Hz | .13 |
| 220 V 60 Hz | .14 |
| 200 V 50 Hz | .15 |
| 200 V 60 Hz | .16 |

Special brochures

Please ask your broncolor representative for detailed special brochures relating to individual broncolor products and services.

broncolor lighting courses – now for digital photography too

Creative lighting, precision, inspiration, style and emotion – even in the age of digital photography, none of these facets have lost in importance. broncolor offers workshops for professional and semi-professional photographers, as well as for advanced amateurs.

The broncolor workshops emphasise hands-on solutions that are developed in small groups of two to four participants. Under the guidance of a professional photographer you will realize demanding shots, including photographic topics – such as glass, chrome-plated steel, textiles, atmospheric stills, as well as special effects – such as running water and multiple-light setups.

Experienced difficulties arising from the set tasks, and their solutions, will then be discussed. Classic photographic challenges will be explained along with the latest photographic techniques. Controllable flash durations and colour temperature, as well as a variety of filter methods are further topics of the course. In short: you benefit from tips, tricks and techniques for your everyday work.

In small groups, mutual inspiration and experience contribute to a creative atmosphere. Additionally, you have the chance to experiment with the extensive range of broncolor lighting equipment and to become acquainted with the wide assortment of light shapers. The purpose of the course is to provide photographers with new capabilities and ideas so they can react faster, more efficiently, and most of all, more effectively to the everyday challenges of the profession.

broncolor Creative Workshops – 2 days pure creativity

broncolor offers a 2-day workshop for the areas “People” and “Product” photography, in which the basic principle of both is identical. Whilst the “Product” workshop concentrates on the realization of product photography, the “People” workshop deals with the topic fashion and portrait photography. The instructor will explain the specific aspects, accompanied by demonstrations with a model, or shots in the group.

Our professionally equipped photographic studio has up to four complete workstations. In addition to digital and analogue medium and large format cameras, the entire broncolor flashlight assortment is available to the participants. The concept is being continuously revised. See our website for the latest version.

creative
workshop



The first edition of *Light Architecture* was published in 2008, the second, revised edition has been available since 2010. The current version is a hardback book; it explains seven new set-ups and has much-improved print quality.

Urs Recher (a commercial photographer since 1993 and employed by Bron Elektronik since 1998) has sub-divided his book into three chapters:

Chapter 1 briefly covers the theory of the photographic properties of light. It makes the photographer's main tool easier to understand, more readily comprehensible, and shows how it can be analysed.

In the second and by far the most comprehensive chapter, a total of 50 different set-ups are explained. The route to the re-

sult (shown unretouched) is explained in precise text on the basis of a diagram of the lighting set-up, and the technical data. The following aspects of photography are covered: beauty and portrait, fashion and full-length portrait, nudes, products, mixed light and photography with existing light.

In the final chapter, the characteristics of different light shapers are described. *Light Architecture 2* is published in English, Spanish and Chinese, and can be obtained from local broncolor representatives.

A multitude of successful photographers is internationally active and makes demands, at the different shooting locations, to rent a broncolor flashlight system, quickly and without complications. And also, often in combination with a professional rental studio.

Bron Elektronik AG offers, in cooperation with its distributors in the various countries, an international rental service, broncolor worldlight. This network precisely meets those requirements. broncolor flashlight systems can be rented in 34 countries in more than 120 rental locations. In certain countries you also have the possibility of renting a broncolor equipped studio.

broncolor worldlight offers you:

- the possibility to rent the desired broncolor flashlight equipment, quickly and without complications

- to temporarily expand your own flashlight equipment, at short notice – for example for a complex shoot
- to use special effect lamps and light shapers for demanding light effects
- to test broncolor equipment before purchasing
- always the latest and state-of-the-art flash equipment

For further information, please contact your local broncolor dealer or us, directly.

A country specific list of our rental studios is available on our website under:

worldlight
RENT A SYSTEM BY **broncolor**

www.broncolor.com
→ Buy/Rent





Bron Elektronik AG
CH-4123 Allschwil / Switzerland
www.bron.ch

D0149.03

We reserve the right to make changes due to technical developments. broncolor, VISATEC, kobold and bron are registered trademarks.
©2013 by Bron Elektronik AG Allschwil. All rights reserved. All images and their copyrights owned by the photographers.
Reprinting and reusing without the permission of the photographer prohibited. Printed in Italy 05/13

 Thomas Morel, Norway